




Luminaire

04-000I-15GGE/840, S



Technical drawing

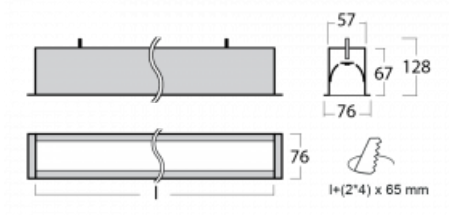

| | |
|--|------------------------|
| Type of installation | Recessed |
| Light distribution | Direct |
| Luminaire shape | Linear |
| Colour of the luminaires | Silver |
| Material | Aluminium |
| Lifetime | L90/B50 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire recessed |
| Dimensions (l x w x h mm) | 863 mm x 76 mm x 67 mm |
| Weight | 2.7 kg |
| Light source | LED MODUL |
| DIR optical system | Microprisma |
| Luminous flux* | 2040 lm |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 110 lm/W |
| MacAdam Light source | 2 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, $\rho=70,50,20$ | 22.1 |

| | |
|------------------------------|----------|
| Luminaire power input* | 18.6 W |
| Connection of the luminaires | ON/OFF |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

   IP 40

*±10 %

Downloads

Installation instructions



Photos

