



Luminaire

Lina60-S

04S-200I-50GETD/830, W



Type of installation Recessed, Surface, Wall mounted, Suspended, 3 circuit track

Light distribution Direct

Luminaire shape Linear

Colour of the luminaires White

Material Aluminium

Lifetime L90/B50 50 000 hours

Warranty 5 years

Description of luminaires Luminaire recessed/surface/wall mounted/suspended/3 circuit track

Dimensions 2805 mm × 57 mm × 67 mm
(l × w × h mm)

Light source LED MODUL

DIR optical system Microprisma

Luminous flux* 2250 lm

Colour Temperature 3000 K warm white

Luminous efficacy 115 lm/W

MacAdam Light source 2


Colour rendering index 80

UGR max. X=4H 18.2
Y=8H, $\rho=70,50,20$




You will appreciate the L-Click system on the Lina60-S luminaire with a direct light distribution, which effectively saves you both time and money. How? The module simply clicks into the profile, so a lot of work is saved during assembly. This solution also prevents the direct touch of the LED technology and lengthens its operating life. The Lina60-S lighting system can be assembled creating endless lines and a big variety of shapes. In addition to great power output, the luminaire also has a great price. It will find its use in commercial, social and public spaces.

Technical drawing

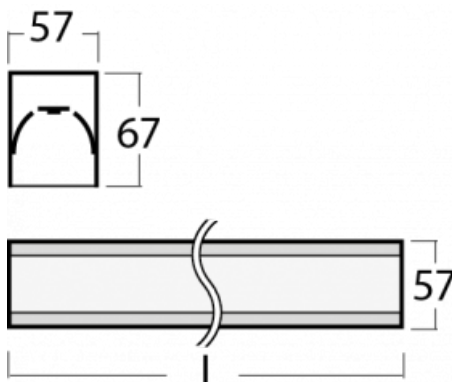

Curve

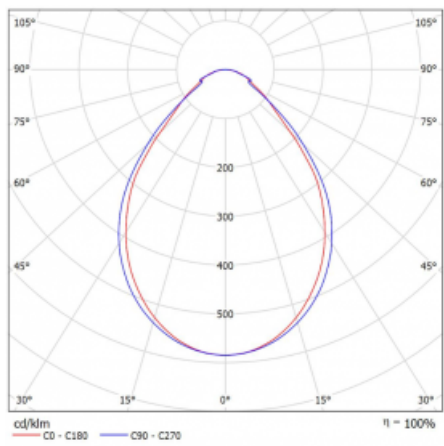

Luminaire power input*	19.5 W
Connection of the luminaires	Other type of dimming
Electrical voltage	220-240V
Frequency	50/60Hz

⊕ CE IP 40

*±10 %

Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-00300, N
wire suspension
2000mm



00-00301, N
wire suspension
4000mm



00-00302, N
wire suspension
6000mm



00-00354, W
cable 5x0,75 1000mm,
white



00-00355, W
cable 5x0,75 2000mm,
white



00-00356, W
cable 5x0,75 4000mm,
white




00-00357, W
cable 5x0,75 6000mm,
white




00-00363, K
cable 5x1,5 2000mm



00-00364, K
cable 5x1,5 4000mm



00-00365, K
cable 5x1,5 6000mm



00-00366, K
cable 7x0,75 2000mm



00-00367, K
cable 7x0,75 4000mm



00-00368, K
cable 7x0,75 6000mm




00-00370, W
ceiling cup 80x80x32mm



00-00600, F
ceiling fastening for
luminaires 132-5xxK,
04-2000x, 05-2000x,
09-200x - 1 piece



00-20700, W
2 pcs of wall fastening
Lipo/Lina/Sant



04-00200, N
straight connector



04-01200, F
Accessory for gear-tray
release



04-20101, W
2xend cap - metal, 5-
conductor terminal box,
grommet



04-20103, W
2xend cap - plastic, 5-
conductor terminal box,
grommet



04-20900, F
bracket for installation
of suspended type of
profile as recessed
trimless