



## Luminaire


# Lina80-S

05S-200K-35GGM3/840, S



Lina80-S luminaires are available in recessed, surface, suspended or wall mounted versions, including the illuminated corner segments. Lina80-S system luminaire can be used to create different shapes or long lines, with special joints that prevent any light to shine through, creating thus a seamless visual effect, suitable for small offices as well as big halls.

## Technical drawing

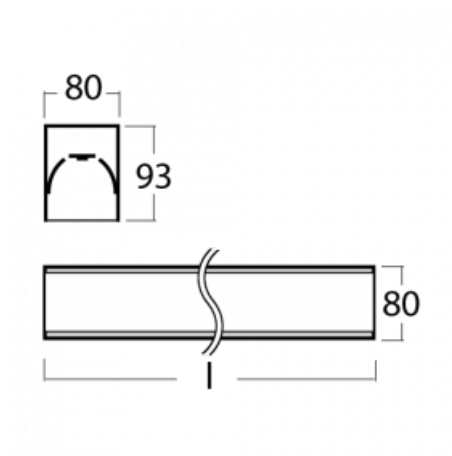

|                                   |                                                                   |
|-----------------------------------|-------------------------------------------------------------------|
| Type of installation              | Recessed, Surface, Wall mounted, Suspended, 3 circuit track       |
| Light distribution                | Direct                                                            |
| Luminaire shape                   | Linear                                                            |
| Colour of the luminaires          | Silver                                                            |
| Material                          | Aluminium                                                         |
| Lifetime                          | L90/B50 60 000 hours                                              |
| Warranty                          | 2 years                                                           |
| Description of luminaires         | Luminaire recessed/surface/wall mounted/suspended/3 circuit track |
| Dimensions (l × w × h mm)         | 1964 mm × 80 mm × 93 mm                                           |
| Light source                      | LED MODUL                                                         |
| DIR optical system                | Opal diffuser                                                     |
| Luminous flux*                    | 5720 lm                                                           |
| Colour Temperature                | 4000 K cool white                                                 |
| Luminous efficacy                 | 132 lm/W                                                          |
| MacAdam Light source              | 2                                                                 |
| Colour rendering index            | 80                                                                |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 25                                                                |

|                              |                       |
|------------------------------|-----------------------|
| Luminaire power input*       | 43.4 W                |
| Connection of the luminaires | ON/OFF + 3h emergency |
| Electrical voltage           | 220-240V              |
| Frequency                    | 50/60Hz               |

  IP 40

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)

## Accessories



**00-00200, N**  
straight connector



**00-00300, N**  
wire suspension  
2000mm



**00-00301, N**  
wire suspension  
4000mm



**00-00302, N**  
wire suspension  
6000mm



**00-00359, K**  
cable 4x0,75 4000mm



**00-00363, K**  
cable 5x1,5 2000mm



**00-00364, K**  
cable 5x1,5 4000mm



**00-00365, K**  
cable 5x1,5 6000mm



**00-00370, S**  
ceiling cup 80x80x32mm



**00-00600, F**  
ceiling fastening for  
luminaires 132-5xxK,  
04-2000x, 05-2000x,  
09-200x - 1 piece



**00-01200, F**  
Accessory for gear-tray  
release



**00-20101, S**  
2xend cap - metal, 5-  
conductor terminal box,  
grommet; Lipo80/Lina80



**00-20103, S**  
2xend cap - plastic, 5-  
conductor terminal box,  
grommet; Lipo80/Lina80



**00-20700, S**  
2 pcs of wall fastening  
Lipo/Lina/Sant



**00-20900, F**  
bracket for installation  
of suspended type of  
profile as recessed  
trimless



**00-21300, S**  
Lipo80-S, Lina80-S -  
pendant profile for track  
luminaires; l = 1122mm



**00-21301, S**  
Lipo80-S, Lina80-S -  
pendant profile for track  
luminaires; l = 2242mm



**00-51300, S**  
set for suspension into  
3-phase track, non-  
dimmable luminaires



**00-51301, S**  
set for suspension into  
3-phase track, dimmable  
luminaires