



Luminaire

Lina80-S

05S-230M-40GEE/840, B



Type of installation Recessed, Surface, Wall mounted, Suspended, 3 circuit track

Light distribution Direct

Luminaire shape Linear

Colour of the luminaires Black

Material Aluminium

Lifetime L90/B50 50 000 hours

Warranty 5 years

Description of luminaires Luminaire recessed/surface/wall mounted/suspended/3 circuit track

Dimensions 2249 mm × 80 mm × 93 mm
(l × w × h mm)

Light source LED MODUL

DIR optical system Matt parabolic louvre

Luminous flux* 5830 lm

Colour Temperature 4000 K cool white

Luminous efficacy 118 lm/W

MacAdam Light source 2


Colour rendering index 80

UGR max. X=4H 16.3
Y=8H, $\rho=70,50,20$




Lina80-S luminaires are available in recessed, surface, suspended or wall mounted versions, including the illuminated corner segments. Lina80-S system luminaire can be used to create different shapes or long lines, with special joints that prevent any light to shine through, creating thus a seamless visual effect, suitable for small offices as well as big halls.

Technical drawing

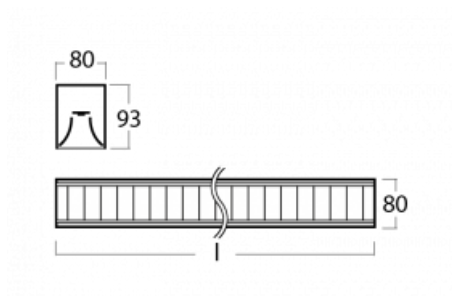

Curve

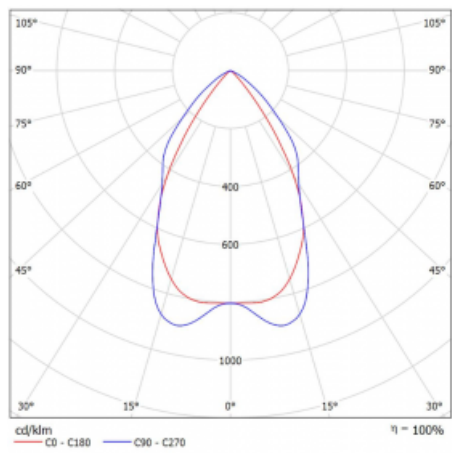

Luminaire power input*	49.2 W
Connection of the luminaires	ON/OFF
Electrical voltage	220-240V
Frequency	50/60Hz

⏚ CE IP 20

*±10 %

Downloads

[Installation instructions](#)[Photos](#)