




## Luminaire


11-501I-25GHE/840, B



## Technical drawing

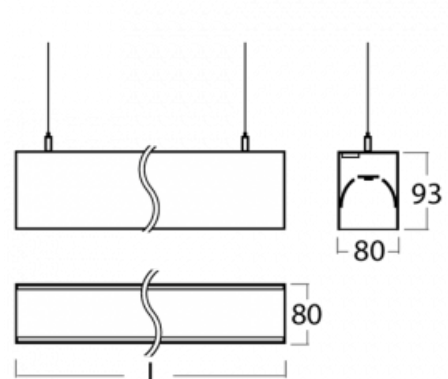

## Curve

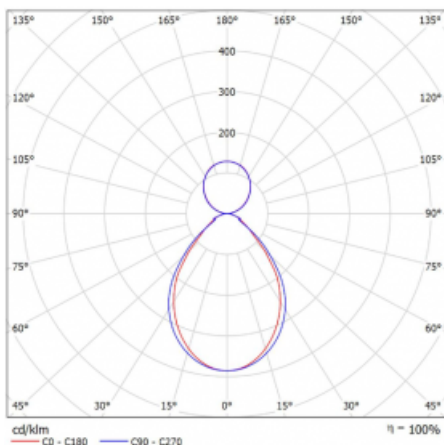

|                           |                             |
|---------------------------|-----------------------------|
| Type of installation      | Suspended                   |
| Light distribution        | Direct-indirect             |
| Luminaire shape           | Linear                      |
| Colour of the luminaires  | Black                       |
| Material                  | Aluminium                   |
| Lifetime                  | L90/B50 50 000 hours        |
| Warranty                  | 5 years                     |
| Description of luminaires | Luminaire suspended         |
| item description          | Black ceiling cup and cable |

|                              |                         |
|------------------------------|-------------------------|
| Dimensions<br>(l × w × h mm) | 1412 mm × 80 mm × 93 mm |
|------------------------------|-------------------------|

|        |        |
|--------|--------|
| Weight | 5.8 kg |
|--------|--------|

|              |           |
|--------------|-----------|
| Light source | LED MODUL |
|--------------|-----------|

|                    |             |
|--------------------|-------------|
| DIR optical system | Microprisma |
|--------------------|-------------|

|                      |            |
|----------------------|------------|
| INDIR optical system | Opal cover |
|----------------------|------------|

|                |         |
|----------------|---------|
| Luminous flux* | 7370 lm |
|----------------|---------|

|                    |                   |
|--------------------|-------------------|
| Colour Temperature | 4000 K cool white |
|--------------------|-------------------|

|                   |          |
|-------------------|----------|
| Luminous efficacy | 107 lm/W |
|-------------------|----------|

|                      |   |
|----------------------|---|
| MacAdam Light source | 2 |
|----------------------|---|

|                        |    |
|------------------------|----|
| Colour rendering index | 80 |
|------------------------|----|

|                                        |      |
|----------------------------------------|------|
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 18.5 |
|----------------------------------------|------|

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 68.8 W   |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |



 IP 40

\*±10 %

## Downloads

Installation instructions



Photos

