



Luminaire

11-501K-35GED/830, W



Type of installation	Suspended
Light distribution	Direct-indirect
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire suspended
item description	White ceiling cup and cable

Dimensions
(l × w × h mm)

1973 mm × 80 mm × 93 mm

Light source

LED MODUL

DIR optical system

Opal diffuser

INDIR optical system

Opal cover

Luminous flux*

5730 lm

Colour Temperature

3000 K warm white

Luminous efficacy

131 lm/W

MacAdam Light source

2

Colour rendering index


80

UGR max. X=4H


20.3

Y=8H, $\rho=70,50,20$

Technical drawing

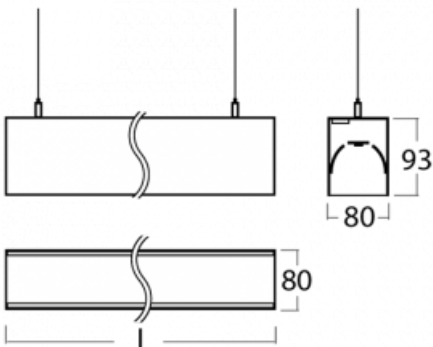

Curve

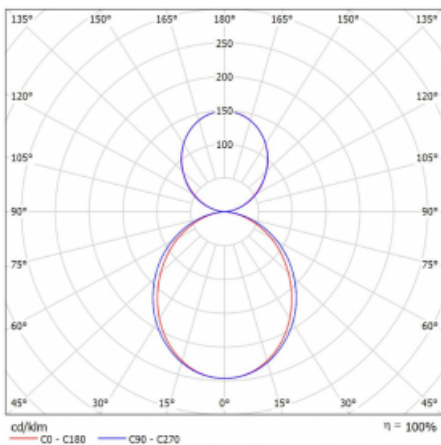

Luminaire power input* 43.8 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

   IP 40

*±10 %

Downloads

Installation instructions



Photos

