



## Luminaire

11-501K-40GHD/830, W



Type of installation	Suspended
Light distribution	Direct-indirect
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire suspended
item description	White ceiling cup and cable

Dimensions  
(l × w × h mm)

2253 mm × 80 mm × 93 mm

Light source

LED MODUL

DIR optical system

Opal diffuser

INDIR optical system

Opal cover

Luminous flux\*

13600 lm

Colour Temperature

3000 K warm white

Luminous efficacy

116 lm/W

MacAdam Light source

2

Colour rendering index


80

UGR max. X=4H


22.7

Y=8H,  $\rho=70,50,20$

## Technical drawing

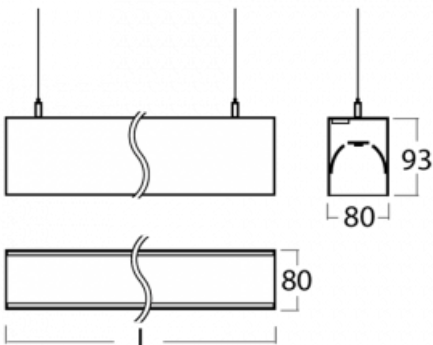

## Curve

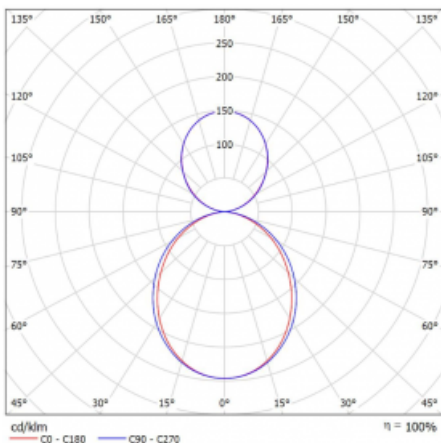

Luminaire power input\* 117.6 W

---

Connection of the luminaires DALI

---

Electrical voltage 220-240V

---

Frequency 50/60Hz

---

   IP 40

\*±10 %

## Downloads

Installation instructions



Photos

