



Luminaire

Lina80


11-531M-50GEE/830, B



EPD®

Lina80 luminaires with an easy L-Click system feature an elegant and classic linear design with excellent illumination characteristics with both ceiling mounted and suspended versions, allowing them to fit into almost any space. Lina80 lighting is the right solution for offices, business, social and cultural spaces, as well as households and restaurants. With Tunable White, you set the white color temperature according to the time of day. The light thus provides optimal light helping you to focus on and concentrate on the work.

Technical drawing

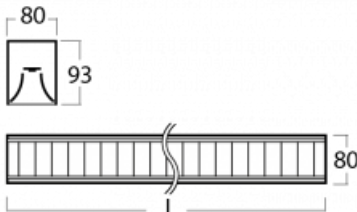

| | |
|-----------------------------------|-----------------------------|
| Type of installation | Suspended |
| Light distribution | Direct-indirect |
| Luminaire shape | Linear |
| Colour of the luminaires | Black |
| Material | Aluminium |
| Lifetime | L90/B50 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire suspended |
| item description | Black ceiling cup and cable |
| Dimensions (l × w × h mm) | 2810 mm × 80 mm × 93 mm |
| Light source | LED MODUL |
| DIR optical system | Matt parabolic louvre |
| INDIR optical system | Opal cover |
| Luminous flux* | 11870 lm |
| Colour Temperature | 3000 K warm white |
| Luminous efficacy | 119 lm/W |
| MacAdam Light source | 2 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 16.2 |

| | |
|------------------------------|----------|
| Luminaire power input* | 100 W |
| Connection of the luminaires | ON/OFF |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

   IP 20

*±10 %

Downloads

Installation instructions



Photos

