



Luminaire


# Lina80-S

11S-501I-25GEE/830, S



Lina80-S luminaires are available in recessed, surface, suspended or wall mounted versions, including the illuminated corner segments. Lina80-S system luminaire can be used to create different shapes or long lines, with special joints that prevent any light to shine through, creating thus a seamless visual effect, suitable for small offices as well as big halls.

### Technical drawing

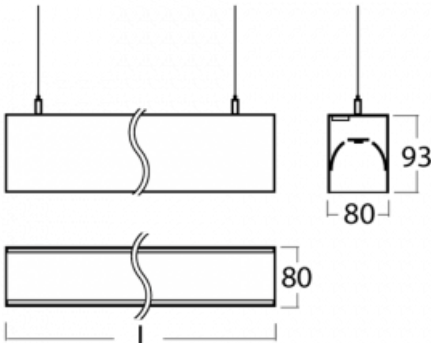

|                                |                                  |
|--------------------------------|----------------------------------|
| Type of installation           | Wall mounted, Suspended          |
| Light distribution             | Direct-indirect                  |
| Luminaire shape                | Linear                           |
| Colour of the luminaires       | Silver                           |
| Material                       | Aluminium                        |
| Lifetime                       | L90/B50 50 000 hours             |
| Warranty                       | 5 years                          |
| Description of luminaires      | Luminaire wall mounted/suspended |
| Dimensions (l x w x h mm)      | 1403 mm x 80 mm x 93 mm          |
| Weight                         | 5.4 kg                           |
| Light source                   | LED MODUL                        |
| DIR optical system             | Microprisma                      |
| INDIR optical system           | Opal cover                       |
| Luminous flux*                 | 3450 lm                          |
| Colour Temperature             | 3000 K warm white                |
| Luminous efficacy              | 115 lm/W                         |
| MacAdam Light source           | 2                                |
| Colour rendering index         | 80                               |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 15.8                             |

## Curve



Luminaire power input\* 30.1 W

Connection of the luminaires ON/OFF

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

\*±10 %

## Downloads

Installation instructions



Photos



**Accessories**

**00-00200, N**  
 straight connector

**00-00300, N**  
 wire suspension  
 2000mm

**00-00301, N**  
 wire suspension  
 4000mm

**00-00302, N**  
 wire suspension  
 6000mm

**00-00352, K**  
 cable 3x0,75 2000mm,  
 transparent

**00-00355, K**  
 cable 5x0,75 2000mm,  
 transparent

**00-00356, K**  
 cable 5x0,75 4000mm,  
 transparent

**00-00358, K**  
 cable 3x0,75 4000mm,  
 transparent

**00-00360, K**  
 cable 3x0,75 6000mm,  
 transparent

**00-00363, K**  
 cable 5x1,5 2000mm

**00-00364, K**  
 cable 5x1,5 4000mm

**00-00365, K**  
 cable 5x1,5 6000mm

**00-00370, S**  
 ceiling cup 80x80x32mm

**00-01200, F**  
 Accessory for gear-tray  
 release

**00-20101, S**  
 2xend cap - metal, 5-  
 conductor terminal box,  
 grommet; Lipo80/Lina80

**00-20103, S**  
 2xend cap - plastic, 5-  
 conductor terminal box,  
 grommet; Lipo80/Lina80

**00-20700, S**  
 2 pcs of wall fastening  
 Lipo/Lina

**00-51300, S**  
 set for suspension into  
 3-phase track, non-  
 dimmable luminaires