



|                           |                         |
|---------------------------|-------------------------|
| Type of installation      | Suspended               |
| Light distribution        | Direct-indirect         |
| Luminaire shape           | Corner                  |
| Colour of the luminaires  | Silver                  |
| Material                  | Aluminium               |
| Lifetime                  | L90/B50 50 000 hours    |
| Warranty                  | 5 years                 |
| Description of luminaires | Luminaire suspended     |
| Dimensions                | 613 mm × 613 mm × 93 mm |
| Light source              | LED MODUL               |

## Luminaire


# Lina80-S

11S-521I-20GHD/830, S



Lina80-S luminaires are available in recessed, surface, suspended or wall mounted versions, including the illuminated corner segments. Lina80-S system luminaire can be used to create different shapes or long lines, with special joints that prevent any light to shine through, creating thus a seamless visual effect, suitable for small offices as well as big halls.

## Technical drawing

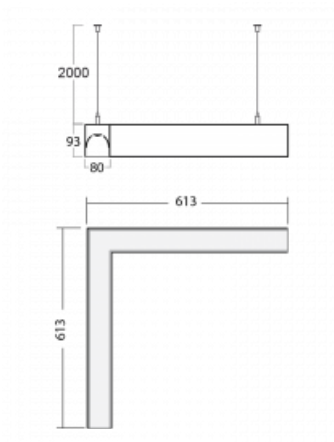

|  |                   |
|--|-------------------|
| Type of optical system                 | Microprisma       |
| Luminous flux*                         | 5250 lm           |
| Colour Temperature                     | 3000 K warm white |
| Luminous efficacy                      | 102 lm/W          |
| MacAdam Light source                   | 2                 |
| Colour rendering index                 | 80                |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 18.7              |

## Curve



Luminaire power input\* 51.6 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

\*±10 %

## Downloads

Installation instructions



Photos



**Accessories**

**00-00200, N**  
 straight connector

**00-00300, N**  
 wire suspension  
 2000mm

**00-00301, N**  
 wire suspension  
 4000mm

**00-00302, N**  
 wire suspension  
 6000mm

**00-00355, K**  
 cable 5x0,75 2000mm

**00-00356, K**  
 cable 5x0,75 4000mm

**00-00363, K**  
 cable 5x1,5 2000mm

**00-00364, K**  
 cable 5x1,5 4000mm

**00-00365, K**  
 cable 5x1,5 6000mm

**00-00366, K**  
 cable 7x0,75 2000mm

**00-00367, K**  
 cable 7x0,75 4000mm

**00-00368, K**  
 cable 7x0,75 6000mm

**00-00370, S**  
 ceiling cup 80x80x32mm

**00-01200, F**  
 Accessory for gear-tray  
 release

**00-20101, S**  
 2xend cap - metal, 5-  
 conductor terminal box,  
 grommet; Lipo80/Lina80

**00-20103, S**  
 2xend cap - plastic, 5-  
 conductor terminal box,  
 grommet; Lipo80/Lina80

**00-20700, S**  
 2 pcs of wall fastening  
 Lipo/Lina

**00-51301, S**  
 set for suspension into  
 3-phase track, dimmable  
 luminaires