

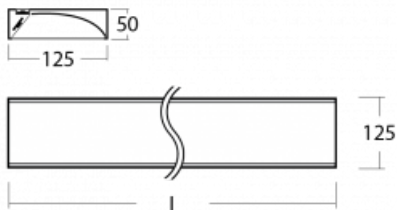

**Luminaire**

# Zuli

121-200D-20GGD/830, B



Do you remember the buzzing and flickering lights of your classroom? Fortunately these are long gone. Zuli pendant and surface-mounted LED luminaires ensure comfortable lighting in the classroom, offices and hospitals without these annoyances. These luminaires have direct or direct-indirect emission, with a choice of four lengths and microprism optics, grid and opal diffuser.

**Technical drawing**


|                              |                          |
|------------------------------|--------------------------|
| Type of installation         | Surface                  |
| Light distribution           | Direct                   |
| Luminaire shape              | Angular                  |
| Colour of the luminaires     | Black                    |
| Material                     | Aluminium                |
| Lifetime                     | L80/B20 50 000 hours     |
| Warranty                     | 5 years                  |
| Description of luminaires    | Luminaire surface        |
| item description             | wall washer              |
| Dimensions<br>(l × w × h mm) | 1145 mm × 125 mm × 50 mm |
| Light source                 | LED MODUL                |
| DIR optical system           | Asymmetric reflector     |
| Luminous flux*               | 3590 lm                  |
| Colour Temperature           | 3000 K warm white        |
| Luminous efficacy            | 107 lm/W                 |
| MacAdam Light source         | 3                        |
| Colour rendering index       | 80                       |

## Curve



Luminaire power input\* 33.7 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

\*±10 %

## Downloads

Installation instructions



Photos

