



## Luminaire


# Zuli

121-200I-30GGM/830, S



Do you remember the buzzing and flickering lights of your classroom? Fortunately these are long gone. Zuli pendant and surface-mounted LED luminaires ensure comfortable lighting in the classroom, offices and hospitals without these annoyances. These luminaires have direct or direct-indirect emission, with a choice of four lengths and microprism optics, grid and opal diffuser.

## Technical drawing

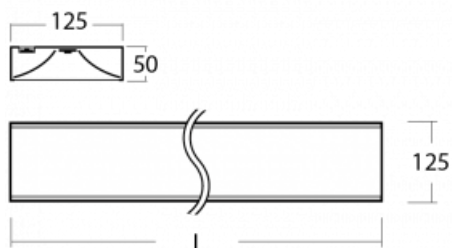

|                                   |                          |
|-----------------------------------|--------------------------|
| Type of installation              | Surface                  |
| Light distribution                | Direct                   |
| Luminaire shape                   | Angular                  |
| Colour of the luminaires          | Silver                   |
| Material                          | Aluminium                |
| Lifetime                          | L80/B20 50 000 hours     |
| Warranty                          | 2 years                  |
| Description of luminaires         | Luminaire surface        |
| Dimensions<br>(l × w × h mm)      | 1705 mm × 125 mm × 50 mm |
| Light source                      | LED MODUL                |
| DIR optical system                | Microprisma              |
| Luminous flux*                    | 4060 lm                  |
| Colour Temperature                | 3000 K warm white        |
| Luminous efficacy                 | 114 lm/W                 |
| MacAdam Light source              | 2                        |
| Colour rendering index            | 80                       |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 18.7                     |

|                              |                       |
|------------------------------|-----------------------|
| Luminaire power input*       | 35.5 W                |
| Connection of the luminaires | ON/OFF + 1h emergency |
| Electrical voltage           | 220-240V              |
| Frequency                    | 50/60Hz               |

  IP 20

\*±10 %

## Downloads

Installation instructions



Photos

