



## Luminaire


# Zuli

121-500I-20GGE/830, B




Do you remember the buzzing and flickering lights of your classroom? Fortunately these are long gone. Zuli pendant and surface-mounted LED luminaires ensure comfortable lighting in the classroom, offices and hospitals without these annoyances. These luminaires have direct or direct-indirect emission, with a choice of four lengths and microprism optics, grid and opal diffuser.

## Technical drawing

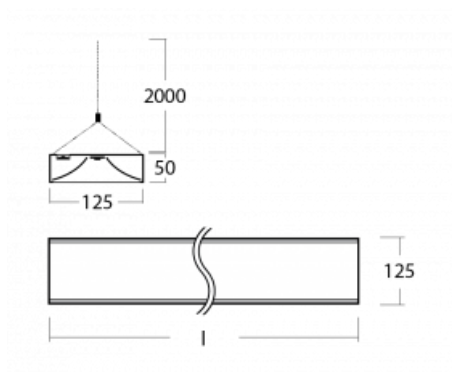

|                                   |                             |
|-----------------------------------|-----------------------------|
| Type of installation              | Suspended                   |
| Light distribution                | Direct                      |
| Luminaire shape                   | Angular                     |
| Colour of the luminaires          | Black                       |
| Material                          | Aluminium                   |
| Lifetime                          | L80/B20 50 000 hours        |
| Warranty                          | 5 years                     |
| Description of luminaires         | Luminaire suspended         |
| item description                  | Black ceiling cup and cable |
| Dimensions<br>(l × w × h mm)      | 1145 mm × 125 mm × 50 mm    |
| Weight                            | 3.5 kg                      |
| Light source                      | LED MODUL                   |
| DIR optical system                | Microprisma                 |
| Luminous flux*                    | 2700 lm                     |
| Colour Temperature                | 3000 K warm white           |
| Luminous efficacy                 | 110 lm/W                    |
| MacAdam Light source              | 2                           |
| Colour rendering index            | 80                          |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 18.7                        |

Curve

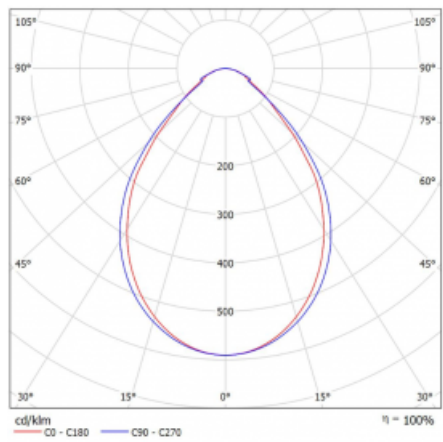

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 24.5 W   |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20  
\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)