



## Luminaire


# Zuli

121-531M-30GEE/830, W



Do you remember the buzzing and flickering lights of your classroom? Fortunately these are long gone. Zuli pendant and surface-mounted LED luminaires ensure comfortable lighting in the classroom, offices and hospitals without these annoyances. These luminaires have direct or direct-indirect emission, with a choice of four lengths and microprism optics, grid and opal diffuser.

## Technical drawing

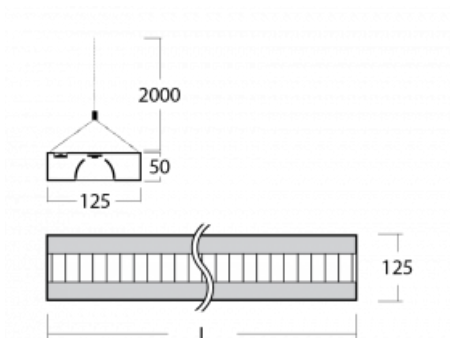

|                                   |                             |
|-----------------------------------|-----------------------------|
| Type of installation              | Suspended                   |
| Light distribution                | Direct-indirect             |
| Luminaire shape                   | Angular                     |
| Colour of the luminaires          | White                       |
| Material                          | Aluminium                   |
| Lifetime                          | L80/B20 50 000 hours        |
| Warranty                          | 5 years                     |
| Description of luminaires         | Luminaire suspended         |
| item description                  | White ceiling cup and cable |
| Dimensions<br>(l × w × h mm)      | 1705 mm × 125 mm × 50 mm    |
| Weight                            | 4.7 kg                      |
| Light source                      | LED MODUL                   |
| DIR optical system                | Matt parabolic louvre       |
| INDIR optical system              | Celar cover                 |
| Luminous flux*                    | 6940 lm                     |
| Colour Temperature                | 3000 K warm white           |
| Luminous efficacy                 | 125 lm/W                    |
| MacAdam Light source              | 2                           |
| Colour rendering index            | 80                          |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 12.6                        |

## Curve



Luminaire power input\* 55.6 W

Connection of the luminaires ON/OFF

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

\* $\pm 10\%$

## Downloads

Installation instructions



Photos

