



## Luminaire


# Zuli-S

121S-500I-25GGD/830, B



We realize that there is beauty in simplicity, so we have created our Zuli-S system luminaire. The Zuli-S luminaire is based on the timeless shape that everyone has known for many years. The luminaires come with a very efficient LED light source, thanks to which the luminaires have a very high economical and, last but not least, ecological value, as they require a relatively small amount of energy. Zuli-S luminaires can be fitted with a parabolic louver made of polished aluminium sheet or an opal diffuser.

## Technical drawing

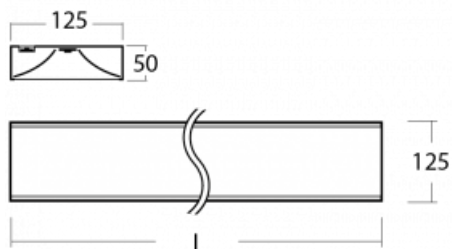

|  |                          |
|--|--------------------------|
| Type of installation                   | Suspended                |
| Light distribution                     | Direct                   |
| Luminaire shape                        | Angular                  |
| Colour of the luminaires               | Black                    |
| Material                               | Aluminium                |
| Lifetime                               | L80/B20 50 000 hours     |
| Warranty                               | 5 years                  |
| Description of luminaires              | Luminaire suspended      |
| Dimensions<br>(l × w × h mm)           | 1415 mm × 125 mm × 50 mm |
| Weight                                 | 4.3 kg                   |
| Light source                           | LED MODUL                |
| DIR optical system                     | Microprisma              |
| Luminous flux*                         | 3380 lm                  |
| Colour Temperature                     | 3000 K warm white        |
| Luminous efficacy                      | 115 lm/W                 |
| MacAdam Light source                   | 2                        |
| Colour rendering index                 | 80                       |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 18.7                     |

Luminaire power input\* 29.5 W

---

Connection of the luminaires DALI

---

Electrical voltage 220-240V

---

Frequency 50/60Hz

---

 **CE** IP 20

\*±10 %

## Downloads

Installation instructions



Photos

