



## Luminaire


# Zuli-S

121S-501I-20GGE/830, W




We realize that there is beauty in simplicity, so we have created our Zuli-S system luminaire. The Zuli-S luminaire is based on the timeless shape that everyone has known for many years. The luminaires come with a very efficient LED light source, thanks to which the luminaires have a very high economical and, last but not least, ecological value, as they require a relatively small amount of energy. Zuli-S luminaires can be fitted with a parabolic louver made of polished aluminium sheet or an opal diffuser.

## Technical drawing

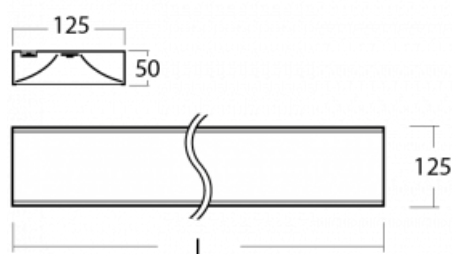

|                                        |                          |
|----------------------------------------|--------------------------|
| Type of installation                   | Suspended                |
| Light distribution                     | Direct-indirect          |
| Luminaire shape                        | Angular                  |
| Colour of the luminaires               | White                    |
| Material                               | Aluminium                |
| Lifetime                               | L80/B20 50 000 hours     |
| Warranty                               | 5 years                  |
| Description of luminaires              | Luminaire suspended      |
| Dimensions<br>(l × w × h mm)           | 1135 mm × 125 mm × 50 mm |
| Weight                                 | 3.7 kg                   |
| Light source                           | LED MODUL                |
| DIR optical system                     | Microprisma              |
| INDIR optical system                   | Celar cover              |
| Luminous flux*                         | 4180 lm                  |
| Colour Temperature                     | 3000 K warm white        |
| Luminous efficacy                      | 114 lm/W                 |
| MacAdam Light source                   | 2                        |
| Colour rendering index                 | 80                       |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 16                       |

Curve

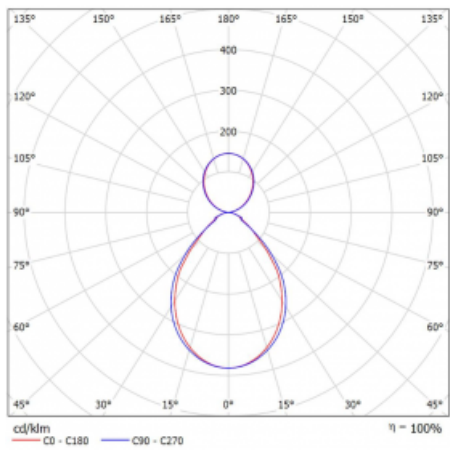

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 36.8 W   |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

⊕ CE IP 20  
\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)

## Accessories



**00-00352, K**  
cable 3x0,75 2000mm,  
transparent



**00-00355, K**  
cable 5x0,75 2000mm,  
transparent



**00-00356, K**  
cable 5x0,75 4000mm,  
transparent



**00-00358, K**  
cable 3x0,75 4000mm,  
transparent



**00-00360, K**  
cable 3x0,75 6000mm,  
transparent



**00-00363, K**  
cable 5x1,5 2000mm



**00-00364, K**  
cable 5x1,5 4000mm



**00-00365, K**  
cable 5x1,5 6000mm



**00-00370, S**  
ceiling cup 80x80x32mm



**121-00200, N**  
straight connector




**121-00300, N**  
wire suspension  
2000mm



**121-00301, N**  
wire suspension  
4000mm



**121-00302, N**  
wire suspension  
6000mm



**121-20101, W**  
2xend cap - plastic