



## Luminaire

# Zuli-S

121S-501I-25GGM/830, B



We realize that there is beauty in simplicity, so we have created our Zuli-S system luminaire. The Zuli-S luminaire is based on the timeless shape that everyone has known for many years. The luminaires come with a very efficient LED light source, thanks to which the luminaires have a very high economical and, last but not least, ecological value, as they require a relatively small amount of energy. Zuli-S luminaires can be fitted with a parabolic louver made of polished aluminium sheet or an opal diffuser.

## Technical drawing




|                                   |                          |
|-----------------------------------|--------------------------|
| Type of installation              | Suspended                |
| Light distribution                | Direct-indirect          |
| Colour of the luminaires          | Black                    |
| Material                          | Aluminium                |
| Lifetime                          | L80/B20 50 000 hours     |
| Warranty                          | 5 years                  |
| Description of luminaires         | Luminaire suspended      |
| Dimensions                        | 1415 mm × 125 mm × 50 mm |
| Light source                      | LED MODUL                |
| Type of optical system            | Microprisma              |
| Luminous flux*                    | 5600 lm                  |
| Colour Temperature                | 3000 K warm white        |
| Luminous efficacy                 | 118 lm/W                 |
| MacAdam Light source              | 2                        |
| Colour rendering index            | 80                       |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 15.6                     |
| Luminaire power input*            | 47.3 W                   |
| Connection of the luminaires      | ON/OFF + 1h emergency    |
| Electrical voltage                | 220-240V                 |
| Frequency                         | 50/60Hz                  |

 **CE** IP 20

\*±10 %

# Curve

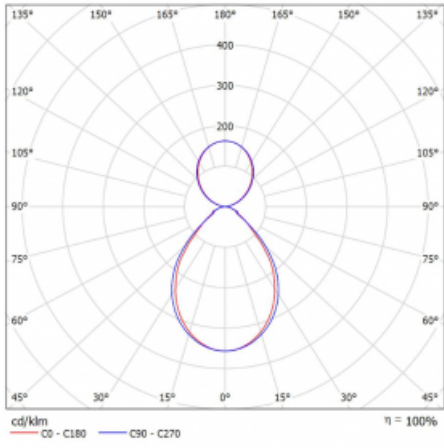

## Downloads

Installation instructions



Photos



**Accessories**

**00-00352, K**  
 cable 3x0,75 2000mm

**00-00355, K**  
 cable 5x0,75 2000mm

**00-00356, K**  
 cable 5x0,75 4000mm

**00-00358, K**  
 cable 3x0,75 4000mm

**00-00360, K**  
 cable 3x0,75 6000mm

**00-00363, K**  
 cable 5x1,5 2000mm

**00-00364, K**  
 cable 5x1,5 4000mm

**00-00365, K**  
 cable 5x1,5 6000mm

**00-00370, S**  
 ceiling cup 80x80x32mm

**121-00200, N**  
 straight connector

**121-00300, N**  
 wire suspension  
 2000mm

**121-00301, N**  
 wire suspension  
 4000mm

**121-00302, N**  
 wire suspension  
 6000mm

**121-20101, B**  
 2xend cap - plastic