



## Luminaire

# Rotao100

127-5COK-10GEE/830, S




## Technical drawing



|  |                      |
|--|----------------------|
| Type of installation                   | Suspended            |
| Light distribution                     | Direct               |
| Luminaire shape                        | Circular             |
| Colour of the luminaires               | Silver               |
| Material                               | Aluminium            |
| Lifetime                               | L80/B20 50 000 hours |
| Warranty                               | 5 years              |
| Description of luminaires              | Luminaire suspended  |
| Dimensions                             | ø 1500 mm × 87 mm    |
| Weight                                 | 19.7 kg              |
| Light source                           | LED MODUL            |
| Type of optical system                 | Opal diffuser        |
| Luminous flux*                         | 6650 lm              |
| Colour Temperature                     | 3000 K warm white    |
| Luminous efficacy                      | 109 lm/W             |
| MacAdam Light source                   | 3                    |
| Colour rendering index                 | 80                   |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 22.5                 |

## Curve

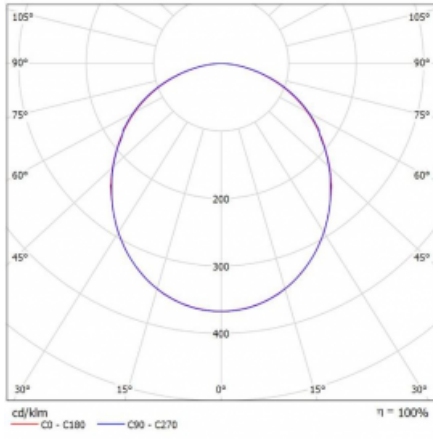

Luminaire power input\* 61.1 W

Connection of the luminaires ON/OFF

Electrical voltage 220-240V

Frequency 50/60Hz

 **CE** IP 20

\* $\pm 10\%$

## Downloads

Installation instructions



Photos

