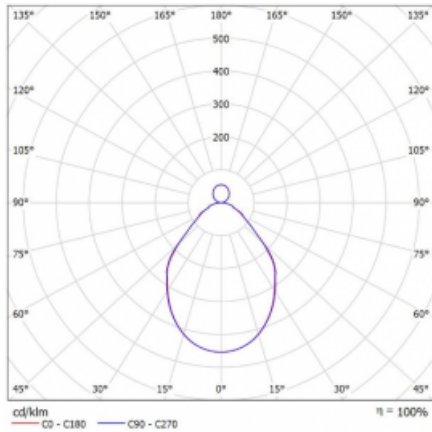



Luminaire

Rotao100

127-5C1I-10GEE/830, B


Curve


| | |
|-----------------------------------|-----------------------------|
| Type of installation | Suspended |
| Light distribution | Direct-indirect |
| Luminaire shape | Circular |
| Colour of the luminaires | Black |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire suspended |
| item description | Black ceiling cup and cable |
| Dimensions | ø 1500 mm × 87 mm |
| Weight | 20.8 kg |
| Light source | LED MODUL |
| DIR optical system | Microprisma |
| INDIR optical system | Opal cover |
| Luminous flux* | 6190 lm |
| Colour Temperature | 3000 K warm white |
| Luminous efficacy | 89 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 16.5 |

| | |
|------------------------------|----------|
| Luminaire power input* | 69.9 W |
| Connection of the luminaires | ON/OFF |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

  IP 20

*±10 %

Downloads

Installation instructions



Photos

