




Luminaire


128S-501K-15GGD/830, S



Technical drawing

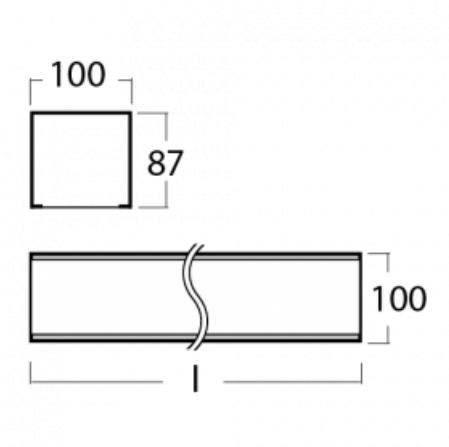

Curve

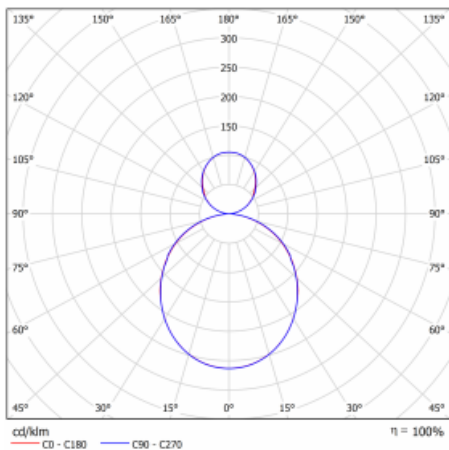

Type of installation	Suspended
Light distribution	Direct-indirect
Luminaire shape	Linear
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire suspended
Dimensions (l × w × h mm)	860 mm × 100 mm × 87 mm
Weight	3.7 kg
Light source	LED MODUL
DIR optical system	Opal diffuser
INDIR optical system	Opal cover
Luminous flux*	1940 lm
Colour Temperature	3000 K warm white
Luminous efficacy	101 lm/W
MacAdam Light source	3
Colour rendering index	80

Luminaire power input*	19.2 W
Connection of the luminaires	DALI
Electrical voltage	220-240V
Frequency	50/60Hz


 IP 20

*±10 %

Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-00300, N
wire suspension
2000mm



00-00301, N
wire suspension
4000mm



00-00302, N
wire suspension
6000mm



00-00355, K
cable 5x0,75 2000mm,
transparent



00-00356, K
cable 5x0,75 4000mm,
transparent



00-00357, K
cable 5x0,75 6000mm,
transparent



00-00370, S
ceiling cup 80x80x32mm



128-20101, S
2xend cap



128-20200, N
arranging coupler