




## Luminaire


128S-501K-15GGD/840, S



## Technical drawing

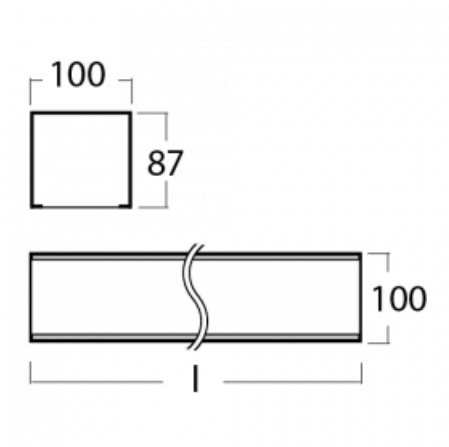

## Curve

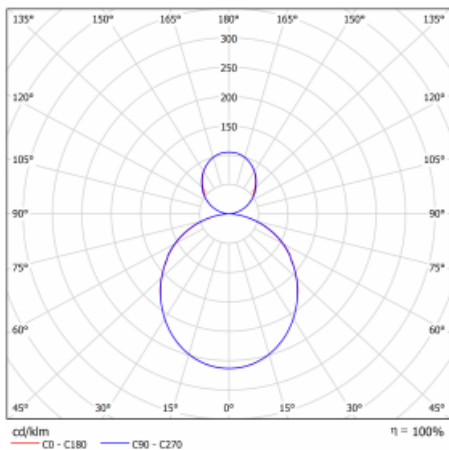

|                              |                         |
|------------------------------|-------------------------|
| Type of installation         | Suspended               |
| Light distribution           | Direct-indirect         |
| Luminaire shape              | Linear                  |
| Colour of the luminaires     | Silver                  |
| Material                     | Aluminium               |
| Lifetime                     | L80/B20 50 000 hours    |
| Warranty                     | 5 years                 |
| Description of luminaires    | Luminaire suspended     |
| Dimensions<br>(l × w × h mm) | 860 mm × 100 mm × 87 mm |
| Light source                 | LED MODUL               |
| DIR optical system           | Opal diffuser           |
| INDIR optical system         | Opal cover              |
| Luminous flux*               | 2040 lm                 |
| Colour Temperature           | 4000 K cool white       |
| Luminous efficacy            | 106 lm/W                |
| MacAdam Light source         | 3                       |
| Colour rendering index       | 80                      |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 19.2 W   |
| Connection of the luminaires | DALI     |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)

## Accessories



**00-00300, N**  
wire suspension  
2000mm




**00-00301, N**  
wire suspension  
4000mm




**00-00302, N**  
wire suspension  
6000mm



**00-00355, K**  
cable 5x0,75 2000mm,  
transparent



**00-00356, K**  
cable 5x0,75 4000mm,  
transparent



**00-00357, K**  
cable 5x0,75 6000mm,  
transparent



**00-00370, S**  
ceiling cup 80x80x32mm



**128-20101, S**  
2xend cap



**128-20200, N**  
arranging coupler