




## Luminaire


128S-501K-25GED/840, S



## Technical drawing

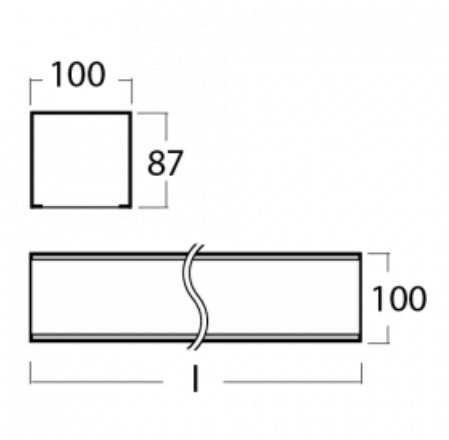

## Curve

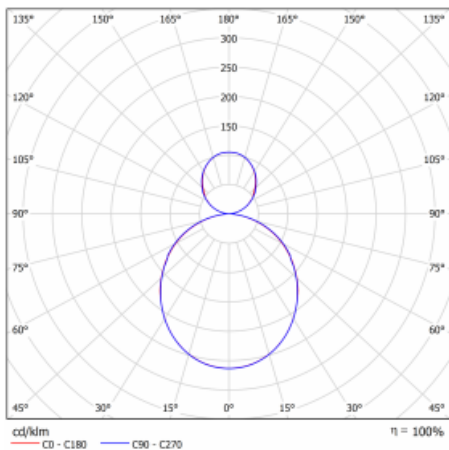

|                              |                          |
|------------------------------|--------------------------|
| Type of installation         | Suspended                |
| Light distribution           | Direct-indirect          |
| Luminaire shape              | Linear                   |
| Colour of the luminaires     | Silver                   |
| Material                     | Aluminium                |
| Lifetime                     | L80/B20 50 000 hours     |
| Warranty                     | 5 years                  |
| Description of luminaires    | Luminaire suspended      |
| Dimensions<br>(l × w × h mm) | 1420 mm × 100 mm × 87 mm |
| Light source                 | LED MODUL                |
| DIR optical system           | Opal diffuser            |
| INDIR optical system         | Opal cover               |
| Luminous flux*               | 2470 lm                  |
| Colour Temperature           | 4000 K cool white        |
| Luminous efficacy            | 109 lm/W                 |
| MacAdam Light source         | 3                        |
| Colour rendering index       | 80                       |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 22.7 W   |
| Connection of the luminaires | DALI     |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)

## Accessories



**00-00300, N**  
wire suspension  
2000mm



**00-00301, N**  
wire suspension  
4000mm



**00-00302, N**  
wire suspension  
6000mm



**00-00355, K**  
cable 5x0,75 2000mm,  
transparent



**00-00356, K**  
cable 5x0,75 4000mm,  
transparent



**00-00357, K**  
cable 5x0,75 6000mm,  
transparent



**00-00370, S**  
ceiling cup 80x80x32mm



**128-20101, S**  
2xend cap



**128-20200, N**  
arranging coupler