




Luminaire


128S-5B0K-045ED/830, B



Technical drawing

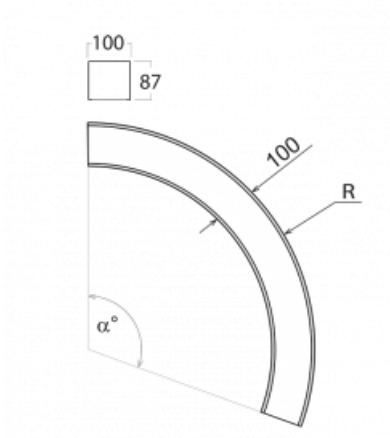

Curve

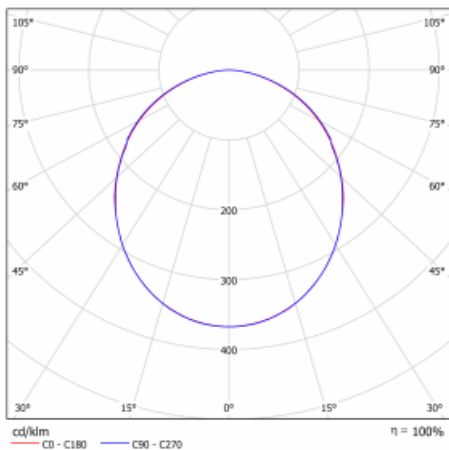

Type of installation Suspended

Light distribution Direct

Luminaire shape Rounded

Colour of the
luminaires Black

Material Aluminium

Lifetime L80/B20 50 000 hours

Warranty 5 years

Description of
luminaires Luminaire suspended

item description R600 - 45°

Dimensions
(w × h mm) 100 mm × 87 mm

Diameter ø 600

Angle 45 °

Weight 2.32 kg

Light source LED MODUL

DIR optical system Opal diffuser

Luminous flux* 630 lm

Colour Temperature 3000 K warm white

Luminous efficacy 102 lm/W

MacAdam Light
source 3

Colour rendering
index 80

Luminaire power input*	6.2 W
Connection of the luminaires	DALI
Electrical voltage	220-240V
Frequency	50/60Hz

  IP 20

*±10 %

Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-00300, N
wire suspension
2000mm



00-00301, N
wire suspension
4000mm



00-00302, N
wire suspension
6000mm



00-00355, B
cable 5x0,75 2000mm,
black



00-00356, B
cable 5x0,75 4000mm,
black



00-00357, B
cable 5x0,75 6000mm,
black



00-00370, B
ceiling cup 80x80x32mm



128-20101, B
2xend cap



128-20200, N
arranging coupler