




Luminaire


128S-5C0K-045EE/830, S



Technical drawing

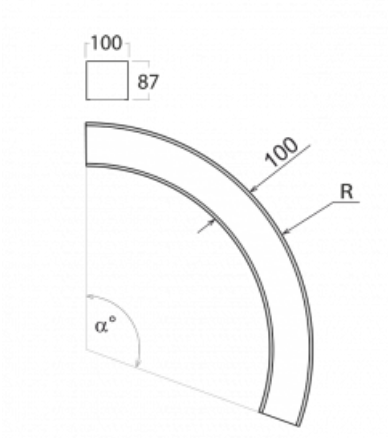

Curve

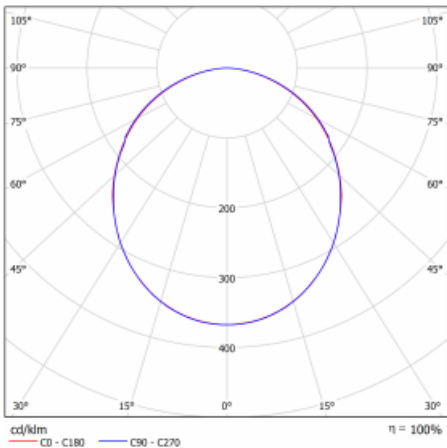

Type of installation	Suspended
Light distribution	Direct
Luminaire shape	Rounded
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire suspended
item description	R750 - 45°
Dimensions (w x h mm)	100 mm x 87 mm
Diameter	ø 750
Angle	45 °
Weight	2.44 kg
Light source	LED MODUL
DIR optical system	Opal diffuser
Luminous flux*	790 lm
Colour Temperature	3000 K warm white
Luminous efficacy	101 lm/W
MacAdam Light source	3
Colour rendering index	80

Luminaire power input*	7.8 W
Connection of the luminaires	ON/OFF
Electrical voltage	220-240V
Frequency	50/60Hz

  IP 20

*±10 %

Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-00300, N
wire suspension
2000mm



00-00301, N
wire suspension
4000mm



00-00302, N
wire suspension
6000mm



00-00352, K
cable 3x0,75 2000mm,
transparent



00-00358, K
cable 3x0,75 4000mm,
transparent



00-00360, K
cable 3x0,75 6000mm,
transparent



00-00370, S
ceiling cup 80x80x32mm



128-20101, S
2xend cap



128-20200, N
arranging coupler