



Luminaire

Flumo100-S

128S-5D0K-045EE/830, B



Large spaces and long corridors – such places require something special: a linear aluminium profile that winds along the corridor in a perfect curve and navigates you through the space. The system luminaires of the Flumo100-S family will fully adapt to your possibilities and imagination. They can run straight or meander like the Colorado River. All the different lengths and angles mean that there are no limits. To assemble the Flumo100-S lighting system you can choose between the pendant and surface versions. They are available with an opal diffuser or microprism in a wide range of colours according to the Halla RAL chart. The luminaires can be controlled via Bluetooth technology from your smart device.

Type of installation Suspended

Light distribution Direct

Luminaire shape Rounded

Colour of the luminaires Black

Material Aluminium

Lifetime L80/B20 50 000 hours

Warranty 5 years

Description of luminaires Luminaire suspended

item description R1000 - 45°

Dimensions (w × h mm) 100 mm × 87 mm

Diameter ø 1000

Angle 45 °

Weight 3.7 kg

Light source LED MODUL

DIR optical system Opal diffuser

Luminous flux* 1100 lm


Colour Temperature 3000 K warm white

Luminous efficacy 102 lm/W

MacAdam Light source 3

Colour rendering index 80


Technical drawing

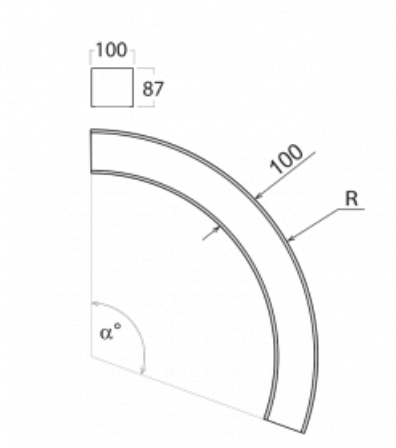

Luminaire power input*	10.8 W
Connection of the luminaires	ON/OFF
Electrical voltage	220-240V
Frequency	50/60Hz

⊕ **CE** IP 20
*±10 %

Curve

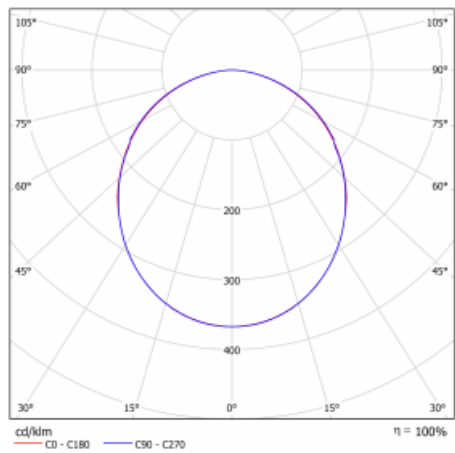

Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-00300, N
wire suspension
2000mm



00-00301, N
wire suspension
4000mm



00-00302, N
wire suspension
6000mm



00-00352, B
cable 3x0,75 2000mm,
black



00-00358, B
cable 3x0,75 4000mm,
black



00-00360, B
cable 3x0,75 6000mm,
black



00-00370, B
ceiling cup 80x80x32mm



128-20101, B
2xend cap



128-20200, N
arranging coupler