




### Luminaire


128S-5E0I-090GE/830, B



### Technical drawing

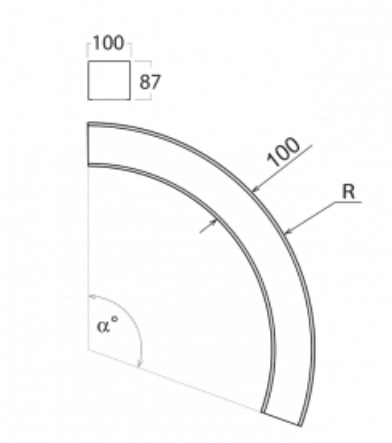

### Curve

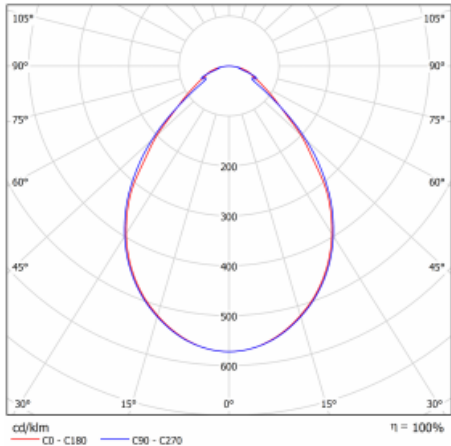

|                           |                      |
|---------------------------|----------------------|
| Type of installation      | Suspended            |
| Light distribution        | Direct               |
| Luminaire shape           | Rounded              |
| Colour of the luminaires  | Black                |
| Material                  | Aluminium            |
| Lifetime                  | L80/B20 50 000 hours |
| Warranty                  | 5 years              |
| Description of luminaires | Luminaire suspended  |
| item description          | R1250 - 90°          |

|                       |                |
|-----------------------|----------------|
| Dimensions (w x h mm) | 100 mm x 87 mm |
| Diameter              | ø 1250         |
| Angle                 | 90 °           |
| Light source          | LED MODUL      |

|                        |                   |
|------------------------|-------------------|
| DIR optical system     | Microprisma       |
| Luminous flux*         | 3120 lm           |
| Colour Temperature     | 3000 K warm white |
| Luminous efficacy      | 80 lm/W           |
| MacAdam Light source   | 3                 |
| Colour rendering index | 80                |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 39 W     |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)

## Accessories



**00-00300, N**  
wire suspension  
2000mm



**00-00301, N**  
wire suspension  
4000mm



**00-00302, N**  
wire suspension  
6000mm



**00-00352, B**  
cable 3x0,75 2000mm,  
black



**00-00358, B**  
cable 3x0,75 4000mm,  
black



**00-00360, B**  
cable 3x0,75 6000mm,  
black



**00-00370, B**  
ceiling cup 80x80x32mm



**128-20101, B**  
2xend cap



**128-20200, N**  
arranging coupler