




## Luminaire


128S-5E1I-090GE/840, W



## Technical drawing

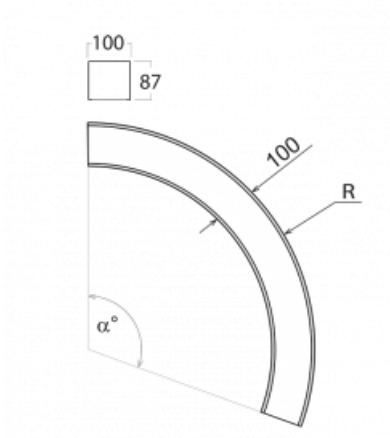

## Curve

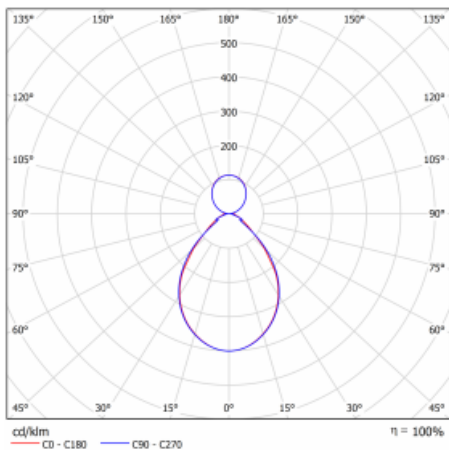

|                           |                      |
|---------------------------|----------------------|
| Type of installation      | Suspended            |
| Light distribution        | Direct-indirect      |
| Luminaire shape           | Rounded              |
| Colour of the luminaires  | White                |
| Material                  | Aluminium            |
| Lifetime                  | L80/B20 50 000 hours |
| Warranty                  | 5 years              |
| Description of luminaires | Luminaire suspended  |
| item description          | R1250 - 90°          |
| Dimensions (w × h mm)     | 100 mm × 87 mm       |
| Diameter                  | ø 1250               |
| Angle                     | 90 °                 |
| Light source              | LED MODUL            |
| DIR optical system        | Microprisma          |
| INDIR optical system      | Opal cover           |
| Luminous flux*            | 4300 lm              |
| Colour Temperature        | 4000 K cool white    |
| Luminous efficacy         | 88 lm/W              |
| MacAdam Light source      | 3                    |
| Colour rendering index    | 80                   |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 48.7 W   |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)