




## Luminaire


128S-5FOI-045GD/830, W



## Technical drawing

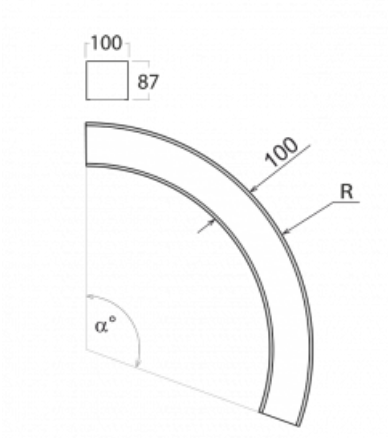

## Curve

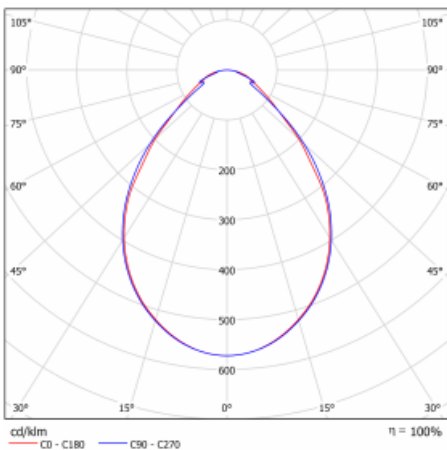

|                           |                      |
|---------------------------|----------------------|
| Type of installation      | Suspended            |
| Light distribution        | Direct               |
| Luminaire shape           | Rounded              |
| Colour of the luminaires  | White                |
| Material                  | Aluminium            |
| Lifetime                  | L80/B20 50 000 hours |
| Warranty                  | 5 years              |
| Description of luminaires | Luminaire suspended  |
| item description          | R1500 - 45°          |
| Dimensions (w x h mm)     | 100 mm x 87 mm       |
| Diameter                  | ø 1500               |
| Angle                     | 45 °                 |
| Light source              | LED MODUL            |
| DIR optical system        | Microprisma          |
| Luminous flux*            | 1820 lm              |
| Colour Temperature        | 3000 K warm white    |
| Luminous efficacy         | 80 lm/W              |
| MacAdam Light source      | 3                    |
| Colour rendering index    | 80                   |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 22.7 W   |
| Connection of the luminaires | DALI     |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |


 IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)