




Luminaire


128S-5FOI-090GD/840, W



Technical drawing

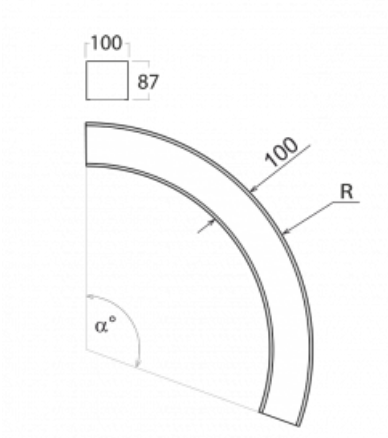

Curve

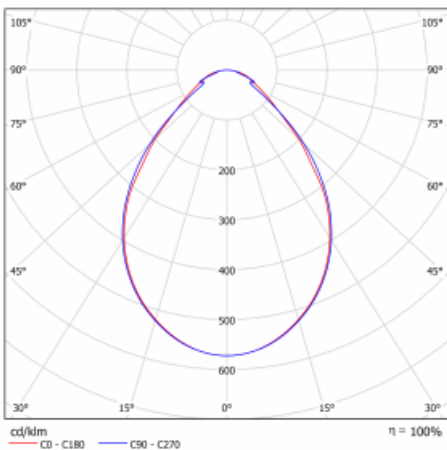

Type of installation Suspended

Light distribution Direct

Luminaire shape Rounded

Colour of the
luminaires White

Material Aluminium

Lifetime L80/B20 50 000 hours

Warranty 5 years

Description of
luminaires Luminaire suspended

item description R1500 - 90°

Dimensions
(w × h mm) 100 mm × 87 mm

Diameter ø 1500

Angle 90 °

Light source LED MODUL

DIR optical system Microprisma

Luminous flux* 3830 lm

Colour Temperature 4000 K cool white

Luminous efficacy 84 lm/W

MacAdam Light
source 3

Colour rendering
index 80

Luminaire power input*	45.5 W
Connection of the luminaires	DALI
Electrical voltage	220-240V
Frequency	50/60Hz

  IP 20

*±10 %

Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-00300, N
wire suspension
2000mm



00-00301, N
wire suspension
4000mm



00-00302, N
wire suspension
6000mm



00-00355, W
cable 5x0,75 2000mm,
white



00-00356, W
cable 5x0,75 4000mm,
white



00-00357, W
cable 5x0,75 6000mm,
white



00-00370, W
ceiling cup 80x80x32mm



128-20101, W
2xend cap



128-20200, N
arranging coupler