



## Luminaire

# Sant


132-500K-25GFQ/TC, S



The Dutch designer Rob van Beek imbued this LED linear luminaire with an opal diffuser with a universal visage. In the Czech Republic, Sant was specially made for LED sources and Human Centric Lighting technology. In practice, it looks like the light changes intensity and color according to biological rhythms. People thus feel natural in closed spaces, because the lighting simulates daylight. If you are looking for individual linear lights for an office, school or hospital, you've just found it.


Design Rob van Beek

## Technical drawing

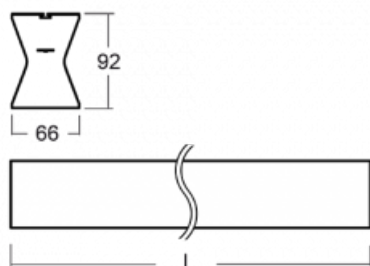

|                                   |                                          |
|-----------------------------------|------------------------------------------|
| Type of installation              | Suspended                                |
| Light distribution                | Direct-indirect                          |
| Luminaire shape                   | Linear                                   |
| Colour of the luminaires          | Silver                                   |
| Material                          | Aluminium                                |
| Lifetime                          | L80/B20 50 000 hours                     |
| Warranty                          | 5 years                                  |
| Description of luminaires         | Luminaire suspended                      |
| item description                  | Silver ceiling cup and transparent cable |
| Dimensions<br>(l × w × h mm)      | 1408 mm × 66 mm × 92 mm                  |
| Weight                            | 3.6 kg                                   |
| Light source                      | LED MODUL                                |
| DIR optical system                | Opal diffuser                            |
| INDIR optical system              | Opal cover                               |
| Luminous flux*                    | 3120 lm                                  |
| Colour Temperature                | 2700 K - 6500 K Tunable White            |
| Luminous efficacy                 | 93 lm/W                                  |
| MacAdam Light source              | 3                                        |
| Colour rendering index            | 90                                       |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 22.3                                     |

Curve

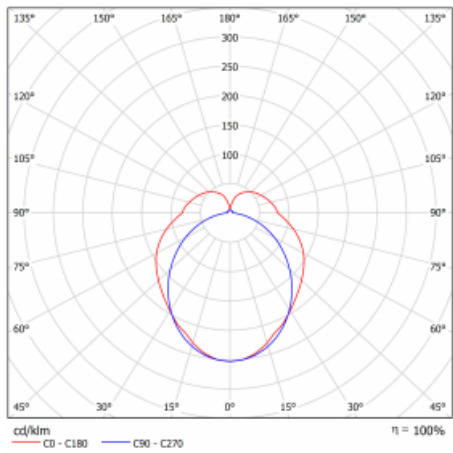

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 33.7 W   |
| Connection of the luminaires | DALI DT8 |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

   IP 40  
\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)