




## Luminaire


145-2C0I-30GGM/840, W



## Technical drawing

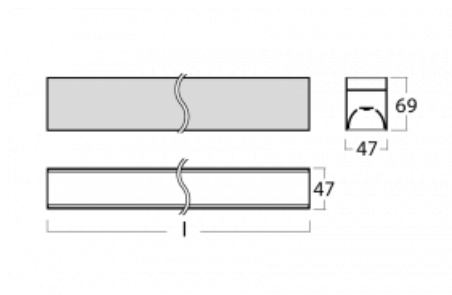

## Curve

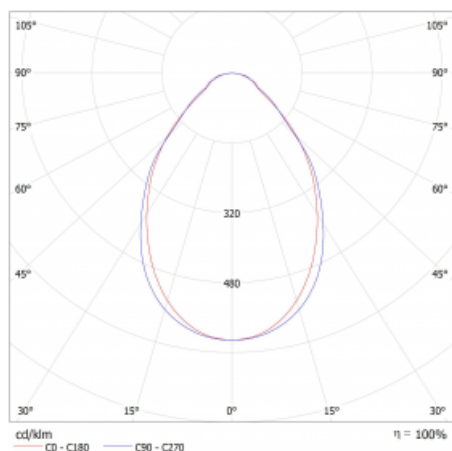

|                                        |                         |
|----------------------------------------|-------------------------|
| Type of installation                   | Surface                 |
| Light distribution                     | Direct                  |
| Luminaire shape                        | Linear                  |
| Colour of the luminaires               | White                   |
| Material                               | Aluminium               |
| Lifetime                               | L80/B20 50 000 hours    |
| Warranty                               | 2 years                 |
| Description of luminaires              | Luminaire surface       |
| Dimensions<br>(l × w × h mm)           | 1691 mm × 47 mm × 69 mm |
| Light source                           | LED MODUL               |
| DIR optical system                     | Microprisma             |
| Luminous flux*                         | 3410 lm                 |
| Colour Temperature                     | 4000 K cool white       |
| Luminous efficacy                      | 146 lm/W                |
| MacAdam Light source                   | 3                       |
| Colour rendering index                 | 80                      |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 22.4                    |

|                              |                       |
|------------------------------|-----------------------|
| Luminaire power input*       | 23.4 W                |
| Connection of the luminaires | ON/OFF + 1h emergency |
| Electrical voltage           | 220-240V              |
| Frequency                    | 50/60Hz               |


 IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)