




## Luminaire


145-5C0I-30GGM/830, S



## Technical drawing

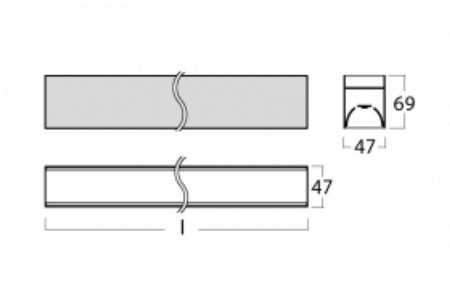

## Curve

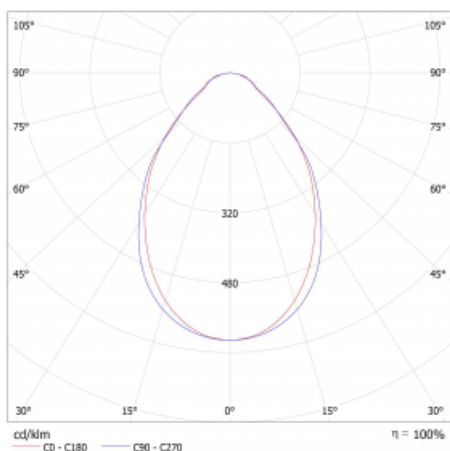

|                                   |                         |
|-----------------------------------|-------------------------|
| Type of installation              | Suspended               |
| Light distribution                | Direct                  |
| Luminaire shape                   | Linear                  |
| Colour of the luminaires          | Silver                  |
| Material                          | Aluminium               |
| Lifetime                          | L80/B20 50 000 hours    |
| Warranty                          | 2 years                 |
| Description of luminaires         | Luminaire suspended     |
| Dimensions<br>(l × w × h mm)      | 1691 mm × 47 mm × 69 mm |
| Light source                      | LED MODUL               |
| DIR optical system                | Microprisma             |
| Luminous flux*                    | 3270 lm                 |
| Colour Temperature                | 3000 K warm white       |
| Luminous efficacy                 | 140 lm/W                |
| MacAdam Light source              | 3                       |
| Colour rendering index            | 80                      |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 22.2                    |

|                              |                       |
|------------------------------|-----------------------|
| Luminaire power input*       | 23.4 W                |
| Connection of the luminaires | ON/OFF + 1h emergency |
| Electrical voltage           | 220-240V              |
| Frequency                    | 50/60Hz               |


 IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)