




## Luminaire


145-5C0Z-35GGD/830, S



## Technical drawing

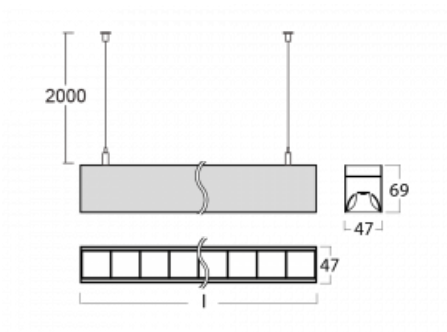

## Curve

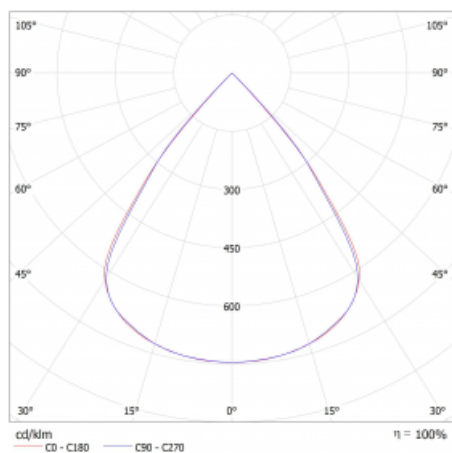

|                           |                                          |
|---------------------------|------------------------------------------|
| Type of installation      | Suspended                                |
| Light distribution        | Direct                                   |
| Luminaire shape           | Linear                                   |
| Colour of the luminaires  | Silver                                   |
| Material                  | Aluminium                                |
| Lifetime                  | L80/B20 50 000 hours                     |
| Warranty                  | 5 years                                  |
| Description of luminaires | Luminaire suspended                      |
| item description          | Silver ceiling cup and transparent cable |

|                                   |                         |
|-----------------------------------|-------------------------|
| Dimensions<br>(l × w × h mm)      | 1972 mm × 47 mm × 69 mm |
| Weight                            | 5 kg                    |
| Light source                      | LED MODUL               |
| DIR optical system                | Plastic louvre low UGR  |
| Luminous flux*                    | 4600 lm                 |
| Colour Temperature                | 3000 K warm white       |
| Luminous efficacy                 | 143 lm/W                |
| MacAdam Light source              | 3                       |
| Colour rendering index            | 80                      |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 17.2                    |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 32.2 W   |
| Connection of the luminaires | DALI     |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)