




## Luminaire


145S-2C0Z-25GGE/840, B



## Technical drawing

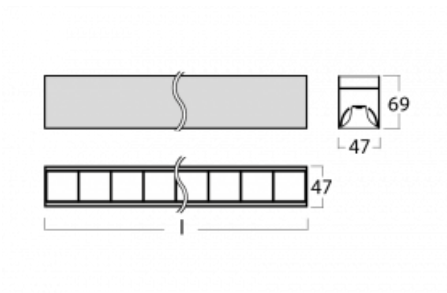

## Curve

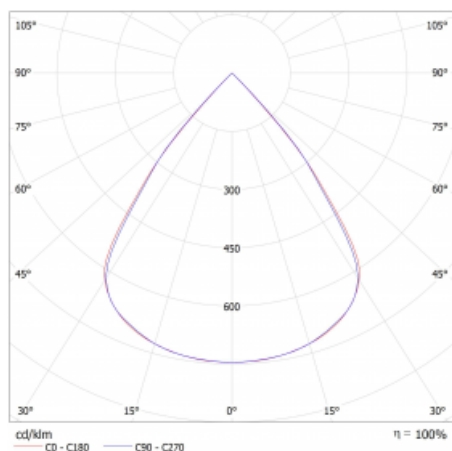

|                                   |                             |
|-----------------------------------|-----------------------------|
| Type of installation              | Surface, Suspended          |
| Light distribution                | Direct                      |
| Luminaire shape                   | Linear                      |
| Colour of the luminaires          | Black                       |
| Material                          | Aluminium                   |
| Lifetime                          | L80/B20 50 000 hours        |
| Warranty                          | 5 years                     |
| Description of luminaires         | Luminaire surface/suspended |
| Dimensions<br>(l × w × h mm)      | 1403 mm × 47 mm × 69 mm     |
| Weight                            | 3.4 kg                      |
| Light source                      | LED MODUL                   |
| DIR optical system                | Plastic louvre low UGR      |
| Luminous flux*                    | 3430 lm                     |
| Colour Temperature                | 4000 K cool white           |
| Luminous efficacy                 | 142 lm/W                    |
| MacAdam Light source              | 3                           |
| Colour rendering index            | 80                          |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 17.4                        |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 24.2 W   |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)