




## Luminaire


=145S-A00I-252HM/840



## Technical drawing

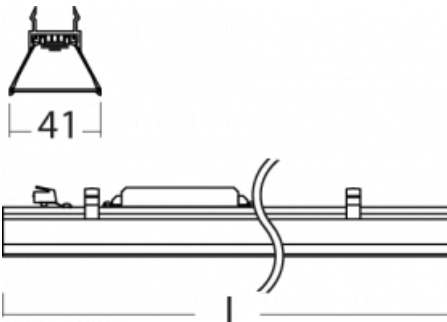

## Curve

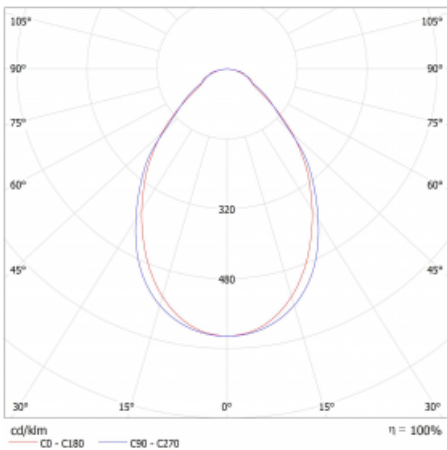

|                           |                      |
|---------------------------|----------------------|
| Light distribution        | Direct               |
| Luminaire shape           | Linear               |
| Material                  | Aluminium            |
| Lifetime                  | L80/B20 50 000 hours |
| Warranty                  | 2 years              |
| Description of luminaires | Luminaire            |

|                              |                         |
|------------------------------|-------------------------|
| Dimensions<br>(l × w × h mm) | 1540 mm × 47 mm × 69 mm |
| Light source                 | LED MODUL               |

|                        |                   |
|------------------------|-------------------|
| DIR optical system     | Microprisma       |
| Luminous flux*         | 4890 lm           |
| Colour Temperature     | 4000 K cool white |
| Luminous efficacy      | 144 lm/W          |
| Colour rendering index | 80                |

|                        |      |
|------------------------|------|
| Luminaire power input* | 34 W |
|------------------------|------|

|                              |                       |
|------------------------------|-----------------------|
| Connection of the luminaires | ON/OFF + 1h emergency |
|------------------------------|-----------------------|

|                    |          |
|--------------------|----------|
| Electrical voltage | 220-240V |
|--------------------|----------|

|           |         |
|-----------|---------|
| Frequency | 50/60Hz |
|-----------|---------|

⊕ CE IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)