




Luminaire


=145S-A00I-351HD/840



Technical drawing

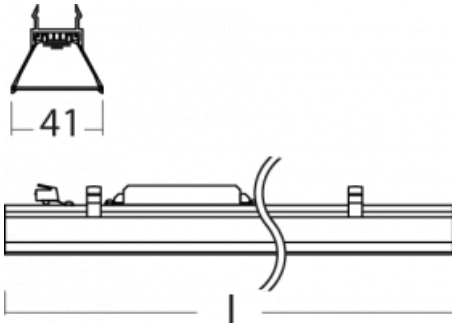

Curve

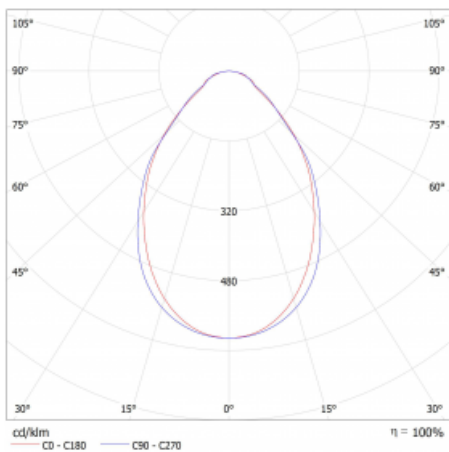

| | |
|------------------------------|-------------------------|
| Light distribution | Direct |
| Luminaire shape | Linear |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire |
| Dimensions (l × w × h mm) | 2030 mm × 47 mm × 69 mm |
| Light source | LED MODUL |
| DIR optical system | Microprisma |
| Luminous flux* | 6450 lm |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 147 lm/W |
| Colour rendering index | 80 |
| Luminaire power input* | 43.9 W |
| Connection of the luminaires | DALI |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

 **CE** IP 20

*±10 %

Downloads

Installation instructions



Photos



Accessories


00-00355, K
cable 5x0,75 2000mm,
transparent



00-00356, K
cable 5x0,75 4000mm,
transparent



00-00357, K
cable 5x0,75 6000mm,
transparent



00-00370, B
ceiling cup 80x80x32mm



00-00370, S
ceiling cup 80x80x32mm



00-00370, W
ceiling cup 80x80x32mm



145-01200, F
Accessory for gear-tray
release for Lina145



145-50101, B
2 x end cap - metal,
screw



145-50101, S
2 x end cap - metal,
screw



145-50101, W
2 x end cap - metal,
screw



145-50102, B
2 x end cap - metal,
screwless



145-50102, S
2 x end cap - metal,
screwless



145-50102, W
2 x end cap - metal,
screwless



145-50200, F
direct connector with
caps of clearance



145-50300, N
wire suspension
2000mm - 1 pc + metal
handle



145-50301, N
wire suspension
4000mm - 1 pc + metal
handle



145-50302, N
wire suspension
6000mm - 1 pc + metal
handle



145-50303, N
wire suspension for joint
2000mm - 1 pc + metal
handle



145-50304, N
wire suspension for joint
4000mm - 1 pc + metal
handle



145-50305, N
wire suspension for joint
6000mm - 1 pc + metal
handle