



## Luminaire


# Fini

160-202K-30GHE/830, E



A single luminaire, Fini, is an invisible luminaire that will enhance the atmosphere of any interior. The luminaires are adjustable which will help you achieve an ideal light effect without any shadows. You can line up a number of single luminaires that come in the lengths of 850 mm, 1130 mm, 1410 mm or 1690 mm. We offer three levels of luminous flux, a tuneable white version and an important IP40 protection. The height available for installing the luminaire should be at least 25 cm, which will help achieve an optimal light effect by adjusting the tilt of the luminaire.

## Technical drawing

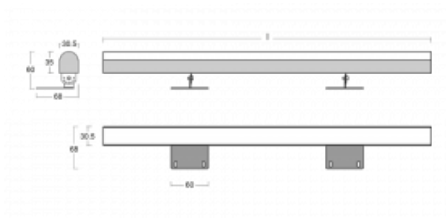

|                           |                         |
|---------------------------|-------------------------|
| Type of installation      | Surface                 |
| Light distribution        | Direct                  |
| Luminaire shape           | Angular                 |
| Colour of the luminaires  | Silver                  |
| Material                  | Aluminium               |
| Lifetime                  | L80/B20 50 000 hours    |
| Warranty                  | 5 years                 |
| Description of luminaires | Luminaire surface       |
| Dimensions                | 1690 mm × 68 mm × 60 mm |
| Light source              | LED MODUL               |

|                                   |                   |
|-----------------------------------|-------------------|
| Type of optical system            | Opal diffuser     |
| Luminous flux*                    | 6950 lm           |
| Colour Temperature                | 3000 K warm white |
| Luminous efficacy                 | 110 lm/W          |
| MacAdam Light source              | 3                 |
| Colour rendering index            | 80                |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 26.1              |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 63.2 W   |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

 **CE** IP 40

\*±10 %

## Downloads

Installation instructions



Photos

