



## Luminaire


# Rundo 62

190-250I-10GGEI/840, W



Circular luminaires with an aluminium profile come in height 62 mm feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

## Curve

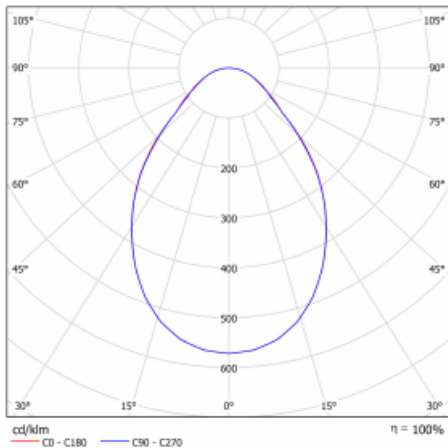

|                                   |                                |
|-----------------------------------|--------------------------------|
| Type of installation              | Surface, Wall mounted          |
| Light distribution                | Direct                         |
| Luminaire shape                   | Circular                       |
| Colour of the luminaires          | White                          |
| Material                          | Aluminium                      |
| Lifetime                          | L90/B50 50 000 hours           |
| Warranty                          | 5 years                        |
| Description of luminaires         | Luminaire surface/wall mounted |
| Dimensions                        | ∅ 500 mm × 62 mm               |
| Weight                            | 5 kg                           |
| Light source                      | LED MODUL                      |
| DIR optical system                | Microprisma                    |
| Luminous flux*                    | 4500 lm                        |
| Colour Temperature                | 4000 K cool white              |
| Luminous efficacy                 | 93 lm/W                        |
| MacAdam Light source              | 3                              |
| Colour rendering index            | 80                             |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 19,4                           |

|                              |                  |
|------------------------------|------------------|
| Luminaire power input*       | 48.4 W           |
| Connection of the luminaires | ON/OFF multiwatt |
| Electrical voltage           | 220-240V         |
| Frequency                    | 50/60Hz          |

   IP 40

\*±10 %

## Downloads

Installation instructions



Photos

