



Luminaire

Rundo 62

190-250K-10GGD/830, B



Circular luminaires with an aluminium profile come in height 62 mm feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

| | |
|-----------------------------------|--------------------------------|
| Type of installation | Surface, Wall mounted |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | Black |
| Material | Aluminium |
| Lifetime | L90/B50 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire surface/wall mounted |
| Dimensions | ø 500 mm × 62 mm |
| Weight | 5.7 kg |
| Light source | LED MODUL |
| DIR optical system | Opal diffuser |
| Luminous flux* | 5390 lm |
| Colour Temperature | 3000 K warm white |
| Luminous efficacy | 118 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 23.8 |

Technical drawing




| | |
|------------------------------|----------|
| Luminaire power input* | 45.5 W |
| Connection of the luminaires | DALI |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |



 IP 40

*±10 %

Curve

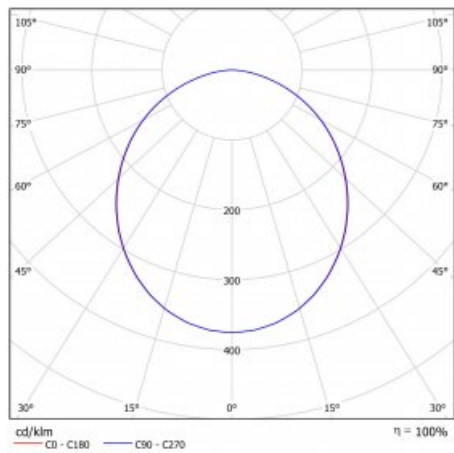

Downloads

[Installation instructions](#)[Photos](#)