



Luminaire


Rundo 62

190-251I-10GGEI/840, S



Circular luminaires with an aluminium profile come in height 62 mm feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

Curve

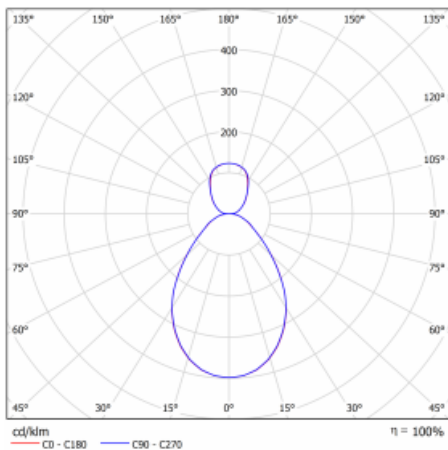

Type of installation Surface, Wall mounted

Light distribution Direct-indirect

Luminaire shape Circular

Colour of the luminaires Silver

Material Aluminium

Lifetime L80/B10 50 000 hours

Warranty 5 years

Description of luminaires Luminaire surface/wall mounted

Dimensions \varnothing 500 mm \times 62 mm

Weight 5.7 kg

Light source LED MODUL

DIR optical system Microprisma

INDIR optical system Opal cover

Luminous flux* 4500 lm

Colour Temperature 4000 K cool white

Luminous efficacy 101 lm/W

MacAdam Light source 3

Colour rendering index 80

UGR max. X=4H 16.6
 Y=8H, $\rho=70,50,20$

Luminaire power input*	44.5 W
Connection of the luminaires	ON/OFF multiwatt
Electrical voltage	220-240V
Frequency	50/60Hz

   IP 40

*±10 %

Downloads

Installation instructions



Photos

