



## Luminaire

# Rundo 62


190-260I-10GHE/830, B



Circular luminaires with an aluminium profile come in height 62 mm feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

|                                |                                |
|--------------------------------|--------------------------------|
| Type of installation           | Surface, Wall mounted          |
| Light distribution             | Direct                         |
| Luminaire shape                | Circular                       |
| Colour of the luminaires       | Black                          |
| Material                       | Aluminium                      |
| Lifetime                       | L90/B50 50 000 hours           |
| Warranty                       | 5 years                        |
| Description of luminaires      | Luminaire surface/wall mounted |
| Dimensions                     | ø 600 mm × 62 mm               |
| Weight                         | 6.3 kg                         |
| Light source                   | LED MODUL                      |
| DIR optical system             | Microprisma                    |
| Luminous flux*                 | 5670 lm                        |
| Colour Temperature             | 3000 K warm white              |
| Luminous efficacy              | 103 lm/W                       |
| MacAdam Light source           | 3                              |
| Colour rendering index         | 80                             |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 19                             |


Technical drawing

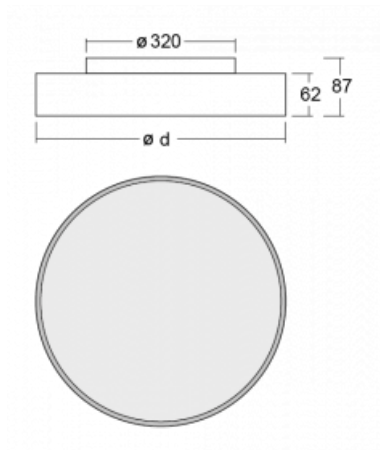

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 54.8 W   |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

⊕ CE  IP 40  
\*±10 %

Curve

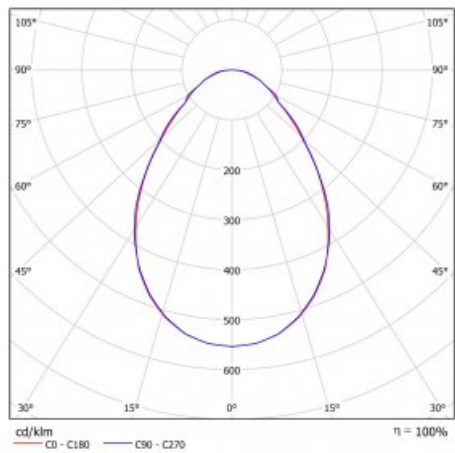

## Downloads

[Installation instructions](#)[Photos](#)