



Luminaire

Rundo 62

190-260K-10GGDI/830, B




Circular luminaires with an aluminium profile come in height 62 mm feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

Type of installation	Surface, Wall mounted
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire surface/wall mounted
Dimensions	ø 600 mm × 62 mm
Weight	6.3 kg
Light source	LED MODUL
DIR optical system	Opal diffuser
Luminous flux*	5500 lm
Colour Temperature	3000 K warm white
Luminous efficacy	131 lm/W
MacAdam Light source	3
Colour rendering index	80
Luminaire power input*	42.1 W
Connection of the luminaires	DALI
Electrical voltage	220-240V
Frequency	50/60Hz


 **CE** IP 40

*±10 %

Technical drawing

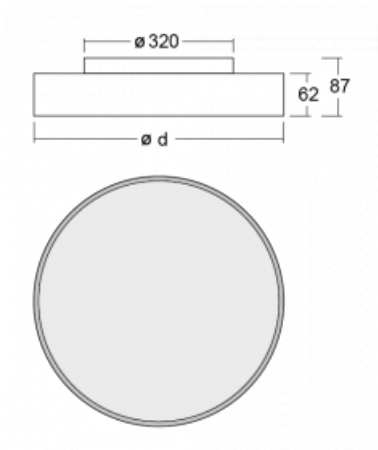

Curve

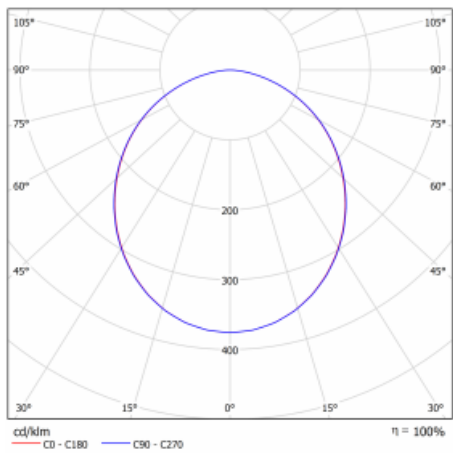

Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-00334, B
suspension set
2000mm, 3 pcs.of wires,
cable 5x0,75mm, ceiling
cup