



Luminaire

Rundo 62

190-261I-10GHD/840, B



Circular luminaires with an aluminium profile come in height 62 mm feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

| | |
|-----------------------------------|--------------------------------|
| Type of installation | Surface, Wall mounted |
| Light distribution | Direct-indirect |
| Luminaire shape | Circular |
| Colour of the luminaires | Black |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire surface/wall mounted |
| Dimensions | ø 600 mm × 62 mm |
| Weight | 6.3 kg |
| Light source | LED MODUL |
| DIR optical system | Microprisma |
| INDIR optical system | Opal cover |
| Luminous flux* | 6130 lm |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 112 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 17.4 |

Technical drawing




| | |
|------------------------------|----------|
| Luminaire power input* | 54.5 W |
| Connection of the luminaires | DALI |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |



 IP 40

*±10 %

Curve

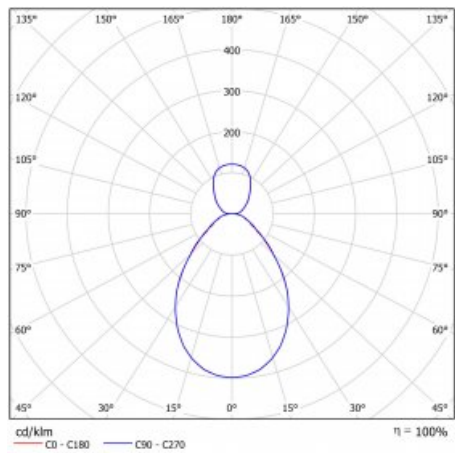

Downloads

[Installation instructions](#)[Photos](#)