



Luminaire

Rundo 62


190-261K-10GGDI/830, B



Circular luminaires with an aluminium profile come in height 62 mm feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

Type of installation	Surface, Wall mounted
Light distribution	Direct-indirect
Luminaire shape	Circular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire surface/wall mounted
Dimensions	ø 600 mm × 62 mm
Weight	6.3 kg
Light source	LED MODUL
DIR optical system	Opal diffuser
INDIR optical system	Opal cover
Luminous flux*	5500 lm
Colour Temperature	3000 K warm white
Luminous efficacy	132 lm/W
MacAdam Light source	3
Colour rendering index	80

Technical drawing

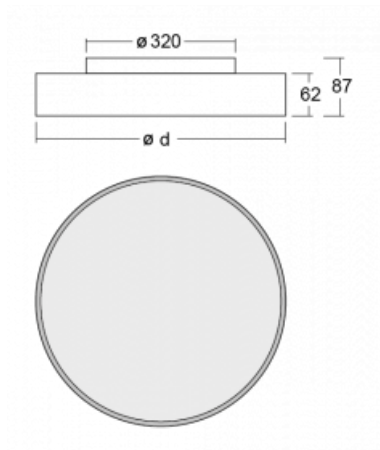


Luminaire power input*	41.8 W
Connection of the luminaires	DALI
Electrical voltage	220-240V
Frequency	50/60Hz


 IP 40

* $\pm 10\%$

Curve

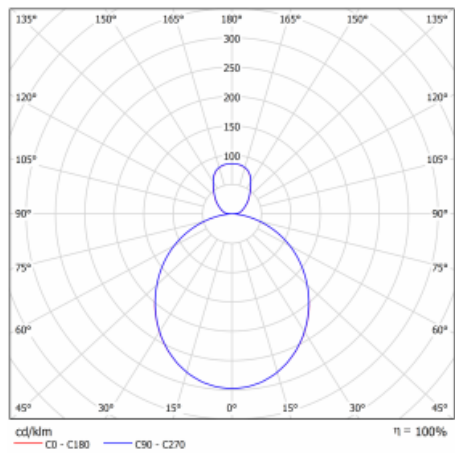

Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-00334, B
suspension set
2000mm, 3 pcs.of wires,
cable 5x0,75mm, ceiling
cup