



## Luminaire


# Gatu

21-001W-10GHV/M/840, S +  
00-00151M




If we combine a simple design with advanced functionality, we get the luminaires of Gatu family. The recessed luminaire with an adjustable reflector can be aimed at the required object. In addition to high-brightness LEDs with colour rendering of  $Ra > 80$  or  $Ra > 90$ , the luminaire also contains a wide range of light sources. The RealWhite technology highlights the white, StrongColour highlights the selected colour, and RealColour with an extremely high colour rendering of  $Ra > 97$  emphasizes the object's own colour. The illuminated object thus looks even more appealing, which makes Gatu luminaires suitable for commercial and cultural spaces, car showrooms and shop windows.

## Technical drawing

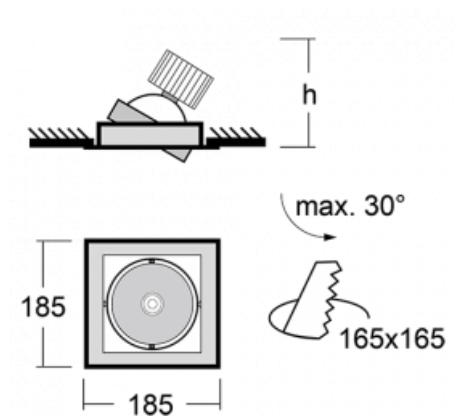

|                              |                          |
|------------------------------|--------------------------|
| Type of installation         | Recessed                 |
| Light distribution           | Direct                   |
| Luminaire shape              | Angular                  |
| Colour of the luminaires     | Silver                   |
| Material                     | Sheet metal              |
| Lifetime                     | L80/B10 50 000 hours     |
| Warranty                     | 5 years                  |
| Description of luminaires    | Luminaire recessed       |
| Dimensions<br>(l × w × h mm) | 185 mm × 185 mm × 100 mm |
| Light source                 | LED MODUL                |
| DIR optical system           | Reflector                |
| Luminous flux*               | 1290 lm                  |
| Colour Temperature           | 4000 K cool white        |
| Luminous efficacy            | 134 lm/W                 |
| MacAdam Light source         | 3                        |
| Colour rendering index       | 80                       |
| Beam angle                   | 62°                      |

Curve

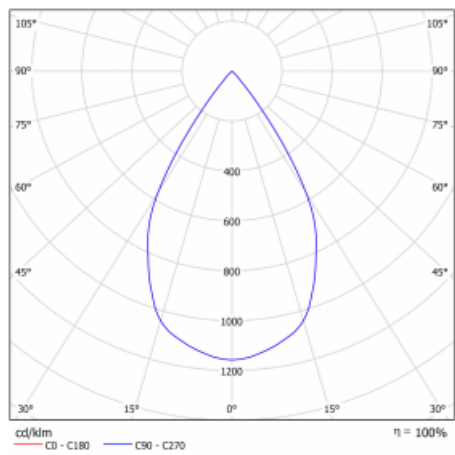

|                              |                       |
|------------------------------|-----------------------|
| Luminaire power input*       | 9.6 W                 |
| Connection of the luminaires | ON/OFF + 1h emergency |
| Electrical voltage           | 220-240V              |
| Frequency                    | 50/60Hz               |

 **CE** IP 20  
\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)