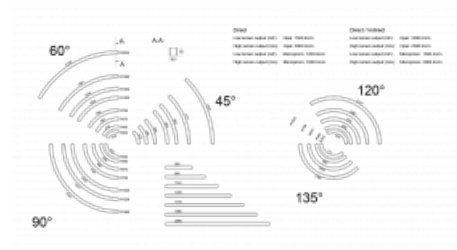



**Luminaire**

# Flumo60-S

**228S-200I-10GGE/830, W**


Based on the great success of Flumo100-S, we decided to create its little brother called Flumo60-S with a narrower profile of 60 mm for a more decent look. It is a linear aluminium profile that winds along the ceiling in a perfect curve and navigates you through the space. The Flumo60-S luminaires are available in both pendant and surface versions. Thanks to a wide range of radii and lengths, the luminaire can be used to create countless shapes of light objects. If we add the possibility of direct or direct-indirect distribution of light and two types of optical systems, we get a universal tool for illuminating social, public or commercial spaces.

**Technical drawing**


Type of installation	Surface, Suspended
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire surface/suspended
Dimensions	580 mm × 60 mm × 65 mm
Light source	LED MODUL

Type of optical system	Microprisma
------------------------	-------------

Luminous flux*	950 lm
----------------	--------

Colour Temperature	3000 K warm white
--------------------	-------------------

Luminous efficacy	86 lm/W
-------------------	---------

MacAdam Light source	3
----------------------	---

Colour rendering index	80
------------------------	----

Luminaire power input*	11 W
------------------------	------

Connection of the luminaires	ON/OFF
------------------------------	--------


Electrical voltage	220-240V
--------------------	----------

Frequency	50/60Hz
-----------	---------

⊕ CE IP 20

\*±10 %

# Curve

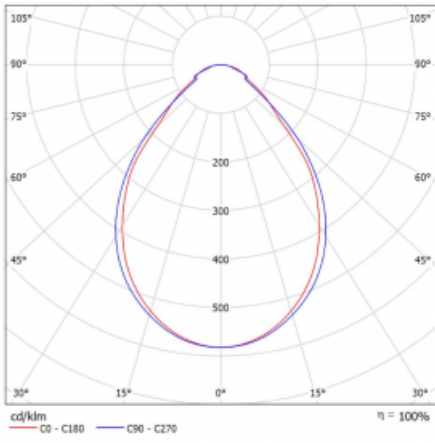

## Downloads

Installation instructions



Photos



**Accessories**

**00-00300, N**  
 wire suspension  
 2000mm

**00-00301, N**  
 wire suspension  
 4000mm

**00-00302, N**  
 wire suspension  
 6000mm

**00-00352, K**  
 cable 3x0,75 2000mm

**00-00358, K**  
 cable 3x0,75 4000mm

**00-00360, K**  
 cable 3x0,75 6000mm

**00-00363, K**  
 cable 5x1,5 2000mm

**00-00364, K**  
 cable 5x1,5 4000mm

**00-00365, K**  
 cable 5x1,5 6000mm

**00-00370, B**  
 ceiling cup 80x80x32mm

**00-00370, S**  
 ceiling cup 80x80x32mm

**00-00370, W**  
 ceiling cup 80x80x32mm

**228-20101, W**  
 2 end caps

**228-20200, N**  
 arranging coupler