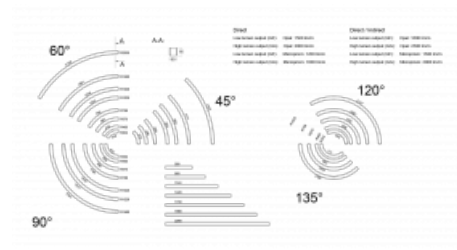

Luminaire

Flumo60-S

228S-200I-15GGE/830, W


Based on the great success of Flumo100-S, we decided to create its little brother called Flumo60-S with a narrower profile of 60 mm for a more decent look. It is a linear aluminium profile that winds along the ceiling in a perfect curve and navigates you through the space. The Flumo60-S luminaires are available in both pendant and surface versions. Thanks to a wide range of radii and lengths, the luminaire can be used to create countless shapes of light objects. If we add the possibility of direct or direct-indirect distribution of light and two types of optical systems, we get a universal tool for illuminating social, public or commercial spaces.

Technical drawing


| | |
|---------------------------|-----------------------------|
| Type of installation | Surface, Suspended |
| Light distribution | Direct |
| Luminaire shape | Linear |
| Colour of the luminaires | White |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire surface/suspended |
| Dimensions | 860 mm × 60 mm × 65 mm |
| Light source | LED MODUL |

| | |
|------------------------|-------------|
| Type of optical system | Microprisma |
|------------------------|-------------|

| | |
|----------------|---------|
| Luminous flux* | 1430 lm |
|----------------|---------|

| | |
|--------------------|-------------------|
| Colour Temperature | 3000 K warm white |
|--------------------|-------------------|

| | |
|-------------------|---------|
| Luminous efficacy | 87 lm/W |
|-------------------|---------|

| | |
|----------------------|---|
| MacAdam Light source | 3 |
|----------------------|---|

| | |
|------------------------|----|
| Colour rendering index | 80 |
|------------------------|----|

| | |
|------------------------|--------|
| Luminaire power input* | 16.5 W |
|------------------------|--------|

| | |
|------------------------------|--------|
| Connection of the luminaires | ON/OFF |
|------------------------------|--------|

| | |
|--------------------|----------|
| Electrical voltage | 220-240V |
|--------------------|----------|

| | |
|-----------|---------|
| Frequency | 50/60Hz |
|-----------|---------|

⊕ CE IP 20

*±10 %

Curve



Downloads

Installation instructions



Photos



Accessories


00-00300, N
wire suspension
2000mm



00-00301, N
wire suspension
4000mm



00-00302, N
wire suspension
6000mm



00-00352, K
cable 3x0,75 2000mm



00-00358, K
cable 3x0,75 4000mm



00-00360, K
cable 3x0,75 6000mm



00-00363, K
cable 5x1,5 2000mm



00-00364, K
cable 5x1,5 4000mm



00-00365, K
cable 5x1,5 6000mm



00-00370, B
ceiling cup 80x80x32mm



00-00370, S
ceiling cup 80x80x32mm



00-00370, W
ceiling cup 80x80x32mm



228-20101, W
2 end caps



228-20200, N
arranging coupler