




Luminaire


228S-200K-35GGE/830, S



Technical drawing

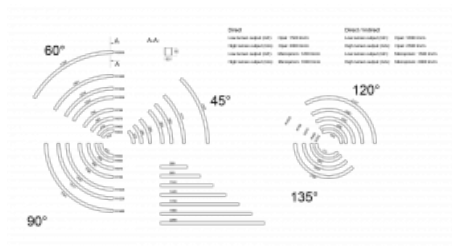

Curve

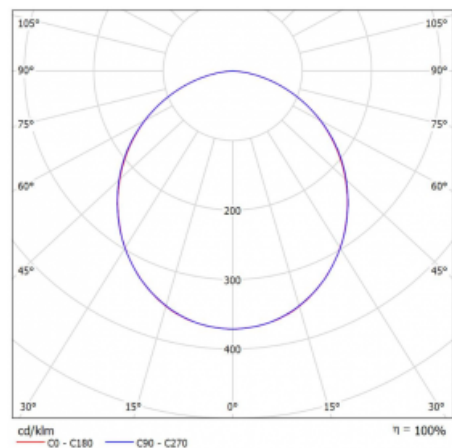

Type of installation	Surface, Suspended
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire surface/suspended
Dimensions (l × w × h mm)	1980 mm × 60 mm × 65 mm
Weight	4.2 kg
Light source	LED MODUL
DIR optical system	Opal diffuser
Luminous flux*	3730 lm
Colour Temperature	3000 K warm white
Luminous efficacy	97 lm/W
MacAdam Light source	3
Colour rendering index	80

Luminaire power input*	38.5 W
Connection of the luminaires	ON/OFF
Electrical voltage	220-240V
Frequency	50/60Hz

  IP 20

*±10 %

Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-00300, N
wire suspension
2000mm



00-00301, N
wire suspension
4000mm



00-00302, N
wire suspension
6000mm



00-00352, K
cable 3x0,75 2000mm,
transparent



00-00358, K
cable 3x0,75 4000mm,
transparent



00-00360, K
cable 3x0,75 6000mm,
transparent



00-00363, K
cable 5x1,5 2000mm



00-00364, K
cable 5x1,5 4000mm



00-00365, K
cable 5x1,5 6000mm



00-00370, B
ceiling cup 80x80x32mm



00-00370, S
ceiling cup 80x80x32mm



00-00370, W
ceiling cup 80x80x32mm



228-20101, S
2 end caps



228-20200, N
arranging coupler