



## Luminaire

# Ineli


235-371I-10GGD/840, B

The product is only available on request.



Pendant luminaire with a transparent optical system, two luminous fluxes and a height of only 27 mm, which is best used in an office. The Ineli luminaire with direct-indirect distribution of light will catch your eye with its low aluminium profile, forming the frame of the lighting area. Thanks to its superior technical features, it can also make every meeting room, informal café or relaxation zone more pleasant. Thanks to the fact that the power is supplied via suspension wires, there is no need for a power cable. The luminaire can be hung horizontally or at any angle, which gives the space an impression of uniqueness and airiness. In addition, it can be perfectly combined with the free-standing version, i.e. the Sineli luminaire.

## Technical drawing

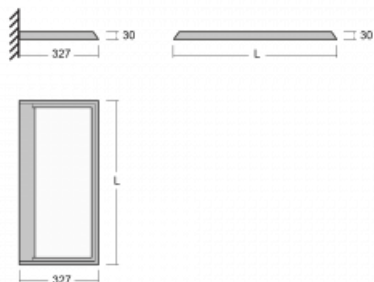

|                           |                         |
|---------------------------|-------------------------|
| Type of installation      | Wall mounted            |
| Light distribution        | Direct-indirect         |
| Luminaire shape           | Angular                 |
| Colour of the luminaires  | Black                   |
| Material                  | Aluminium               |
| Lifetime                  | L80/B20 50 000 hours    |
| Warranty                  | 5 years                 |
| Description of luminaires | Luminaire wall mounted  |
| item description          | MAX load capacity 3 kg  |
| Dimensions (l × w × h mm) | 600 mm × 340 mm × 27 mm |
| Light source              | LED MODUL               |
| DIR optical system        | Microprisma             |
| INDIR optical system      | Opal cover              |
| Luminous flux*            | 4640 lm                 |
| Colour Temperature        | 4000 K cool white       |
| Luminous efficacy         | 131 lm/W                |
| MacAdam Light source      | 3                       |
| Colour rendering index    | 80                      |

Luminaire power input\* 35.3 W

---

Connection of the luminaires DALI

---

Electrical voltage 220-240V

---

Frequency 50/60Hz

---

 **CE** IP 20

\*±10 %

## Downloads

Installation instructions



Photos

