



## Luminaire


# Rofo

250-K0CF-30GDD/940, W




The word integration perfectly describes the Rofo-S luminaires. The luminaires can literally be clicked into the metal ceiling system of leading manufacturers Knauf, Hunter Douglas, Dampa and T-Bar. The luminaires thus form an integral part of the ceiling as they are without a visible frame. The advantage is not only the ease of installation, but also the elegant design of the entire lighting system. The luminaire width is 100 mm and the luminaire lengths are, of course, multiples of 600 mm with regard to standardised ceiling dimensions. Thanks to the opal variant, but above all the microprismatic optical material, the specific power of up to 130lm/W and the luminous flux of 2000 lm/m while maintaining UGR<19, the luminaires are perfect for offices. But they also serve well in corridors, meeting rooms, auditoriums or laboratories.

## Technical drawing

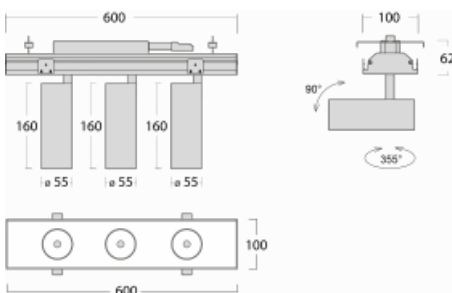

|                              |                         |
|------------------------------|-------------------------|
| Type of installation         | Recessed                |
| Light distribution           | Direct                  |
| Luminaire shape              | Linear                  |
| Colour of the luminaires     | White                   |
| Material                     | Aluminium               |
| Lifetime                     | L80/B20 50 000 hours    |
| Warranty                     | 5 years                 |
| Description of luminaires    | Luminaire recessed      |
| item description             | Knauf; Adels connector  |
| Dimensions<br>(l × w × h mm) | 600 mm × 100 mm × 62 mm |
| Light source                 | LED MODUL               |
| DIR optical system           | Reflector               |
| Luminous flux*               | 3750 lm                 |
| Colour Temperature           | 4000 K cool white       |
| Luminous efficacy            | 276 lm/W                |
| MacAdam Light source         | 3                       |
| Colour rendering index       | 90                      |
| Beam angle                   | 45°                     |

Curve

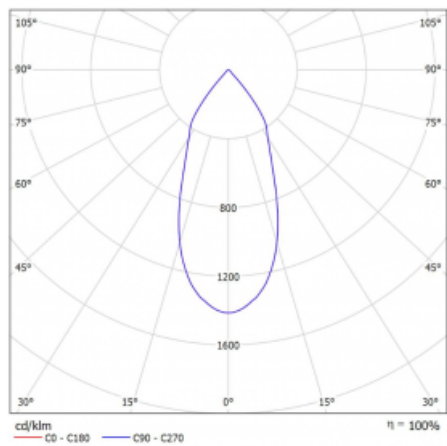

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 40.8 W   |
| Connection of the luminaires | DALI     |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

⏚ CE IP 20  
\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)